

**IN THE UNITED STATES DISTRICT COURT
FOR THE SOUTHER DISTRICT OF INDIANA
INDIANAPOLIS DIVISION**

ABC IP, LLC, a Delaware limited liability company,	)	
	)	CASE NO. 1:26-CV-01170
	)	
and	)	
	)	COMPLAINT FOR PATENT INFRINGEMENT
RARE BREED TRIGGERS, INC., a Texas corporation,	)	
	)	
Plaintiffs.	)	
	)	JURY TRIAL DEMANDED
v.-	)	
	)	
WILLIAM MCALLISTER, an Individual, d/b/a 80% Lowers,	)	
	)	
Defendant.	)	
	)	
	)	

This is an action for patent infringement in which ABC IP, LLC (“ABC”) and Rare Breed Triggers, Inc. (“Rare Breed”) (collectively, “Plaintiffs”) accuse William McAllister d/b/a 80% Lowers (“Defendant”), of infringing U.S. Patent Nos. 12,038,247; 12,031,784; 12,529,538; 12,578,159; and 12,636,403 as follows:

PARTIES

1. ABC is a limited liability company organized under the laws of the State of Delaware with an address at 8 The green, Suite A, Dover, Delaware 19901.

2. Rare Breed is a Texas corporation having a place of business at 2710 Central Freeway, Suite 150-151, Wichita Falls, TX 76306.

3. Upon information and belief, William McAllister, d/b/a 80% Lowers is an individual, and a resident of the State of Indiana, with an address of 5719 Lawtop Loop E. Drive, #112, Indianapolis, Indiana 46216.

JURISDICTION AND VENUE

4. This is an action for patent infringement arising under 35 U.S.C. §§ 271(a)-(c), 281, and 284-85.

5. This Court has subject matter jurisdiction over this action under 28 U.S.C. § 1338, which directs that United States District Courts shall have original jurisdiction of any civil action arising under any Act of Congress relating to patents and pursuant to 28 U.S.C. § 1331, which pertains to civil actions arising under the laws of the United States.

6. Personal jurisdiction over Defendant is proper in this District because the Defendant resides in and has a regular and established place of business in this District.

7. Venue is proper in this district pursuant to 28 U.S.C. § 1400(b). Defendant resides in or has committed acts of infringement and has a regular and established place of business in this District.

BACKGROUND

8. This lawsuit asserts direct, contributory, and induced infringement of U.S. Patent Nos. 12,038,247 (“the ’247 Patent”), 12,031,784 (“the ’784 Patent”), 12,529,538 (“the ’538 Patent”), 12,578,159 (“the ’159 Patent”), and 12,636,403 (“the ’403 Patent”) (together, “the Asserted Patents”).

9. The ’247 Patent was lawfully and properly issued by the United States Patent and Trademark Office on July 16, 2024. Each and every claim of the ’247 Patent is valid and enforceable. A true and correct copy of the ’247 Patent is attached as Exhibit A.

10. The '784 Patent was lawfully and properly issued by the United States Patent and Trademark Office on July 9, 2024. Each and every claim of the '784 Patent is valid and enforceable. A true and correct copy of the '784 Patent is attached as Exhibit B.

11. The '538 Patent was lawfully and properly issued by the United States Patent and Trademark Office on January 20, 2026. Each and every claim of the '538 Patent is valid and enforceable. A true and correct copy of the '538 Patent is attached as Exhibit C.

12. The '159 Patent was lawfully and properly issued by the United States Patent and Trademark Office on March 17, 2026. Each and every claim of the '159 Patent is valid and enforceable. A true and correct copy of the '159 Patent is attached as Exhibit D.

13. The '403 Patent was lawfully and properly issued by the United States Patent and Trademark Office on May 26, 2026. Each and every claim of the '403 Patent is valid and enforceable. A true and correct copy of the '403 Patent is attached as Exhibit E.

14. ABC is the current owner by assignment of all right, title and interest in and to the Asserted Patents. These assignments have been recorded at the United States Patent and Trademark Office ("USPTO").

15. Rare Breed is the exclusive licensee of the Asserted Patents.

16. Plaintiffs have complied with the requirements of 35 U.S.C. § 287 either because the Asserted Patents are not practiced by ABC or any licensee and/or because any licensee has been required to mark its product.

17. Upon information and belief, Defendant has committed acts of direct, contributory, and induced patent infringement, which will be described in more detail below. These acts are in violation of 35 U.S.C. § 271 and should be considered willful.

THE INVENTIONS

18. A typical AR15-pattern firearm, for example, is considered a semiautomatic firearm. The operation of a *standard disconnecter* AR-pattern trigger mechanism is commenced by the trigger member being pulled by the user. The trigger member releases the hammer from the trigger sear and allows the hammer to strike the firing pin. A portion of the propellant gas is used to begin the process of sending the bolt carrier to the rear of the firearm. The rearward movement of bolt carrier cocks the hammer on the disconnecter and then the bolt is allowed to return forward into battery with a new round inserted into the chamber. While this is happening, in the standard AR-pattern semiautomatic trigger, the user can either continue to hold the trigger member in a pulled (i.e., fired) state or allow the trigger to return to its reset state, in which the sear, rather than the disconnecter, engages and holds the hammer in a cocked position. When the user reduces pressure on the trigger member to allow the trigger spring to reset the trigger member, the disconnecter releases the hammer to engage the trigger sear.

19. In the standard AR-pattern trigger assembly, the purpose of the disconnecter is to hold the hammer in a cocked position until the trigger member is reset by a trigger spring when the user lets the trigger reset. The disconnecter allows the firearm to be fired only a single time when the trigger is pulled and held, because the user is not typically able to manually reset the trigger rapidly enough so that the sear engages before the bolt carrier or bolt returns to its in-battery position. The disconnecter prevents the firearm from either firing multiple rounds on a single pull of the trigger, or from allowing the hammer to simply “follow” the bolt carrier as it returns to battery without firing a second round, leaving the hammer uncocked.

20. In contrast, in a forced reset trigger mechanism, cycling of the bolt carrier or bolt causes the trigger member to be forced to the reset position and hold the trigger member there until

the bolt or bolt carrier is back in battery, when it is safe for the user to pull the trigger again, without the need for a disconnecter.

21. The '247 and '159 Patents provide a novel device for accelerating the firing sequence of any semiautomatic firearm, in contrast to a standard semiautomatic trigger or other prior art devices that allow an accelerated rate of semiautomatic firing. The device can be selected to operate in either a standard semiautomatic mode or a forced reset semiautomatic mode and uses a cam, rotated by cycling of the action, to force the trigger member to reset and prevent the trigger member from being pulled again until the action has returned to the in-battery position.

22. The '784 Patent provides a device that works in a forced reset trigger system as an extended trigger member locking mechanism for use with a semi-automatic firearm that employs, in some embodiments, a “deflectable extension of the locking member that is actuated by forward movement of the bolt carrier,” among other innovations as explicitly claimed. Certain inventions of the '784 Patent overcome the geometric limitations of prior art designs for use in multiple and varied semi-automatic firearm designs by allowing a locking member to deflect or fold separately from the body portion of the locking member when contacted by the forward portion of the bolt carrier as it cycles to the rear.

23. The '538 Patent provides a safety mechanism for a firearm that employs a cam selector, a lever, and a trigger. The cam selector contains multiple recesses and is configured to operate between a first mode, a second mode, and a third mode. In the first mode, a portion of the trigger referred to as a first trigger tail portion is movable within the first recess. In the second mode, the first trigger tail portion is allowed to engage the second recess and be moved down by a cam portion of the second recess when the cam selector rotates. In the third mode, the cam selector is configured to prevent the trigger from being pulled.

24. The '403 Patent describes and claims a similarly operating device with the additional feature that it can be selected to operate in either of two distinct modes: 1) standard disconnecter semiautomatic mode and 2) forced reset semiautomatic mode.

25. The claims of the patents define the scope of the patented inventions.

THE INFRINGING DEVICES

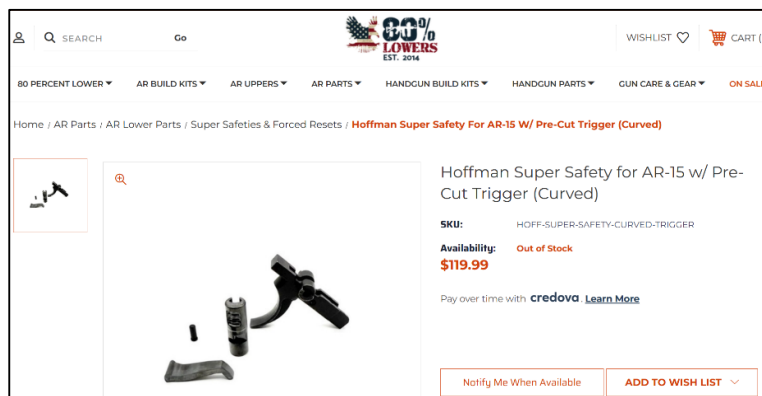
26. On information and belief, Defendant previously or is currently making, using, selling, and/or offering for sale products that embody the technology claimed in the Asserted Patents, including the following (collectively, the “Infringing Devices”):

I. The Super Safety

27. On information and belief, Defendant is currently making, using, selling, and/or offering for sale a (3-Position) “Super Safety” (“the Super Safety”), which embodies the technology claimed in at least the '247, '784, '538, '159, and '403 Patents.

28. On information and belief, Defendant is making, using, selling, and/or offering for sale the Super Safety via the website www.80-lower.com/products/hoffman-super-safety-for-ar-15-w-pre-cut-trigger-curved/, in a complete kit, which includes at minimum the cam and cam lever components and additional components (e.g., a standard AR-pattern hammer, disconnecter, standard springs, and a modified trigger).

An exemplary photograph is shown below:



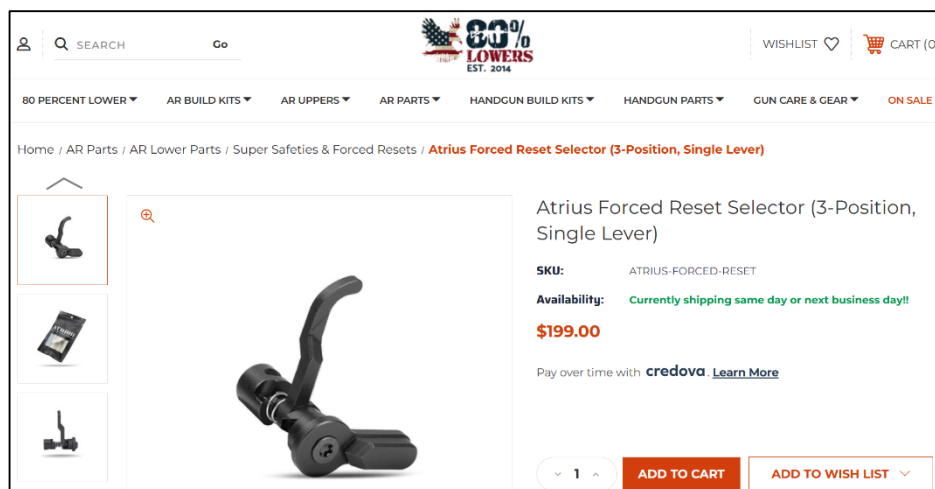
29. The Super Safety can operate in a “disconnecter mode,” which is much like that of a standard AR-15 trigger. The user can switch between safe, standard semiautomatic with disconnecter, and forced reset semiautomatic with cam modes by moving the safety selector laterally between positions.

II. The Atrius Selector

30. On information and belief, Defendant is currently making, using, selling, and/or offering for sale a (3-Position) “Atrius Forced Reset Selector” (“the Atrius Selector”), which embodies the technology claimed in at least the ’247, ’784, ’159, and ’403 Patents.

31. On information and belief, Defendant is making, using, selling, and/or offering for sale the Atrius Selector via the website www.80-lower.com/products/atrus-forced-reset-selector-3-position-single-lever/ as a standalone product.

32. An exemplary photograph is shown below:



33. The Atrius Selector can operate in a “disconnecter mode,” which is much like that of a standard AR-15 trigger. The user can switch between safe, standard semiautomatic with

disconnecter, and forced reset semiautomatic with cam modes by rotating the safety selector between positions.

COUNT I – INFRINGEMENT OF THE '247 PATENT

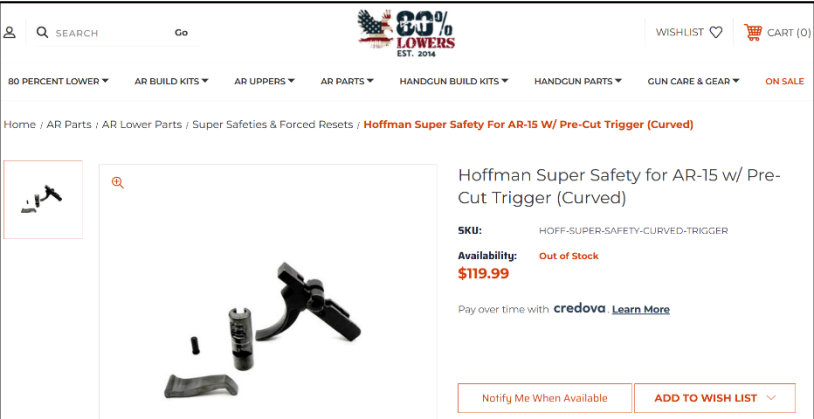
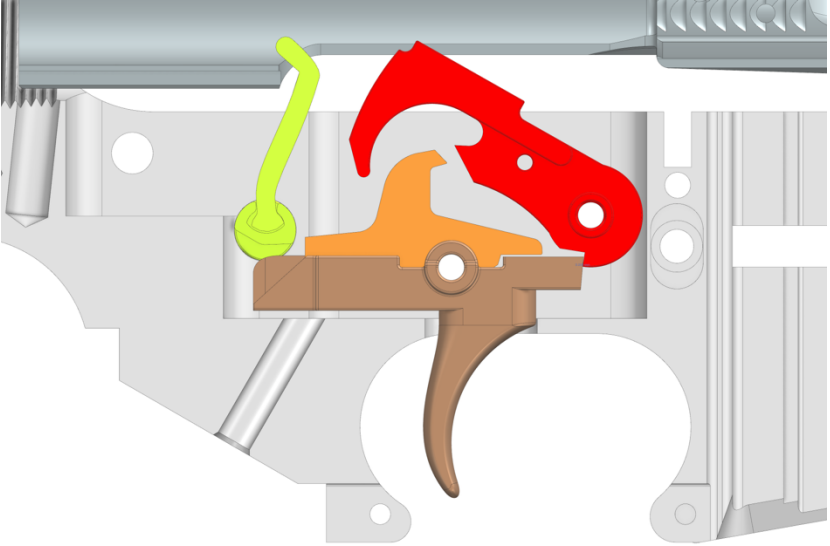
34. Plaintiffs re-allege and incorporate the allegations of the preceding paragraphs as if fully set forth herein.

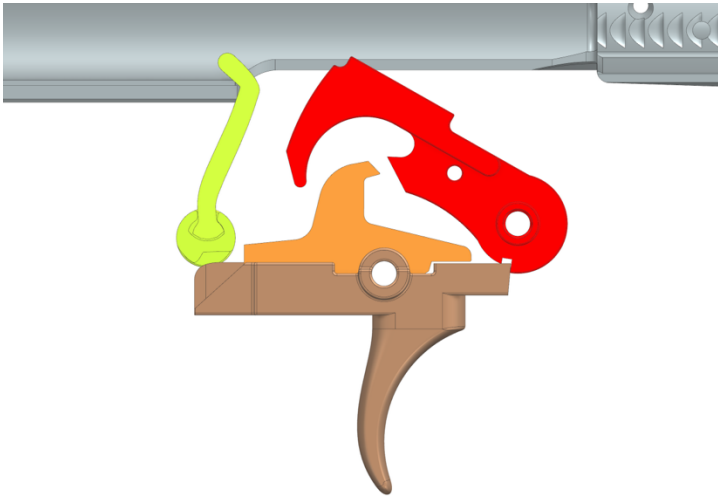
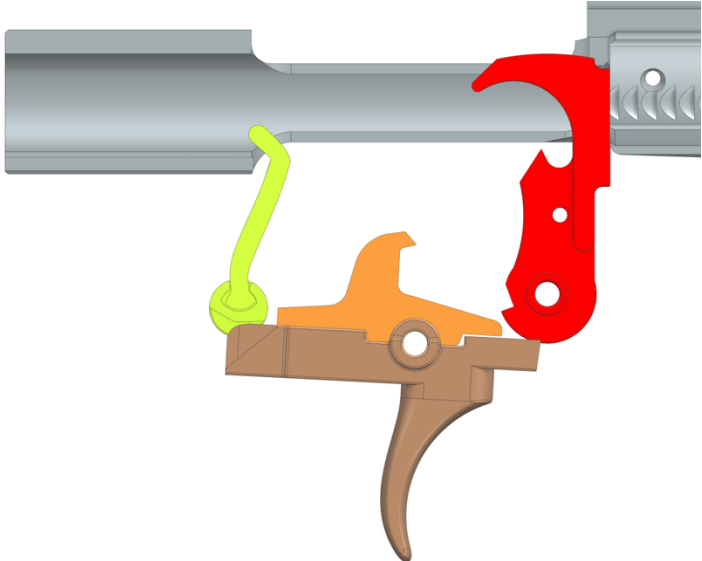
35. In violation of 35 U.S.C. § 271, Defendant has infringed, induced others to infringe, and/or contributed to the infringement of one or more claims of the '247 Patent, including but not limited to claim 15, literally and/or under the doctrine of equivalents, by among other things, making, using, offering for sale, selling, and/or importing into the United States unlicensed products in a manner that infringes the '247 Patent. Such unlicensed products include the Super Safety, Atrius Selector, and ARC-Fire.

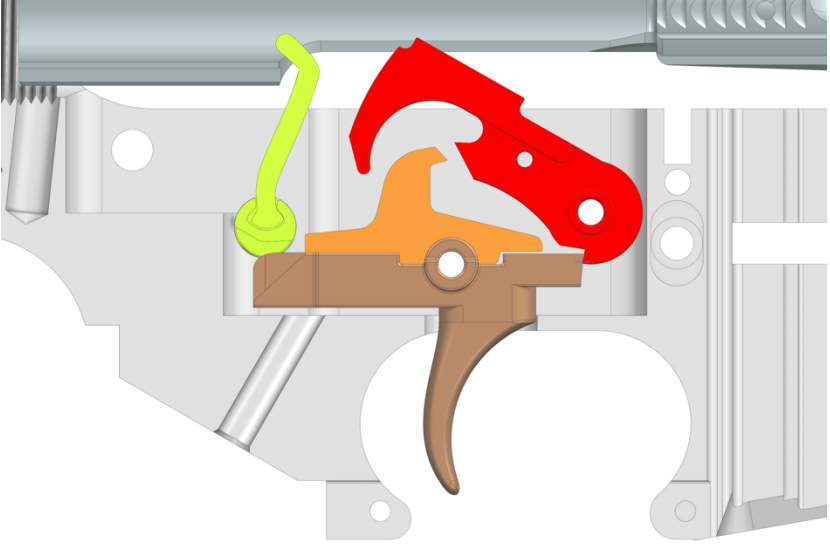
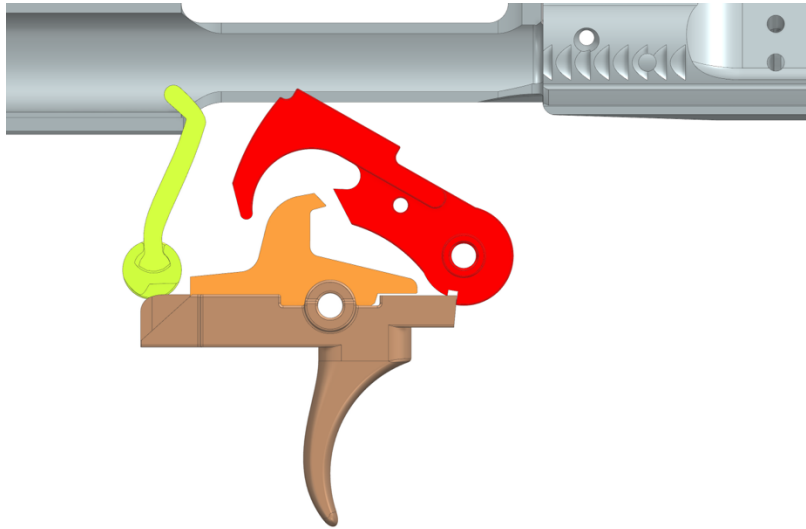
36. On information and belief, Defendant has and continues to willfully infringe, induce others to infringe, and/or contribute to the infringement of one or more claims of the '247 Patent, including but not limited to claim 15, literally and/or under the doctrine of equivalents.

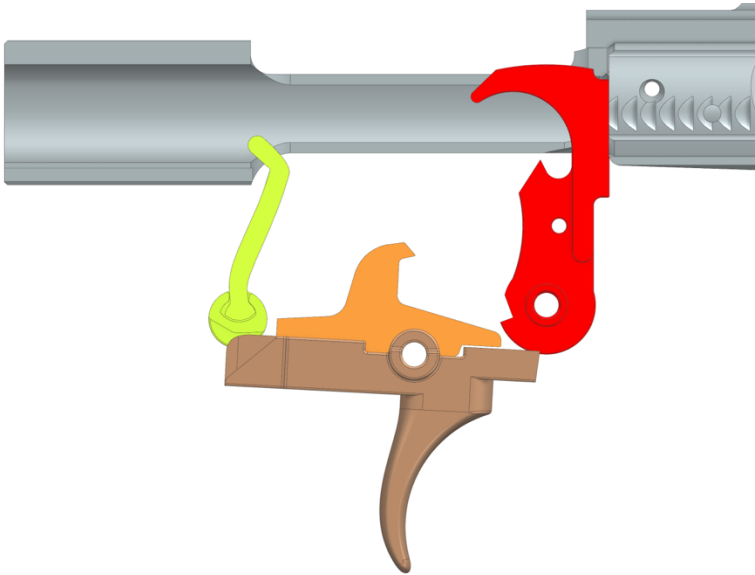
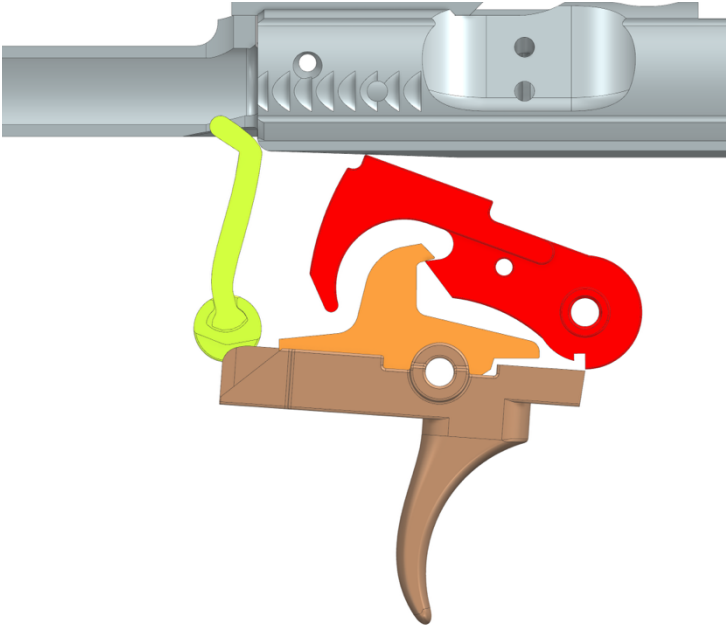
37. An exemplary comparison of the Super Safety, when assembled and used as intended, with claim 15 of the '247 Patent, is illustrated in the chart below:


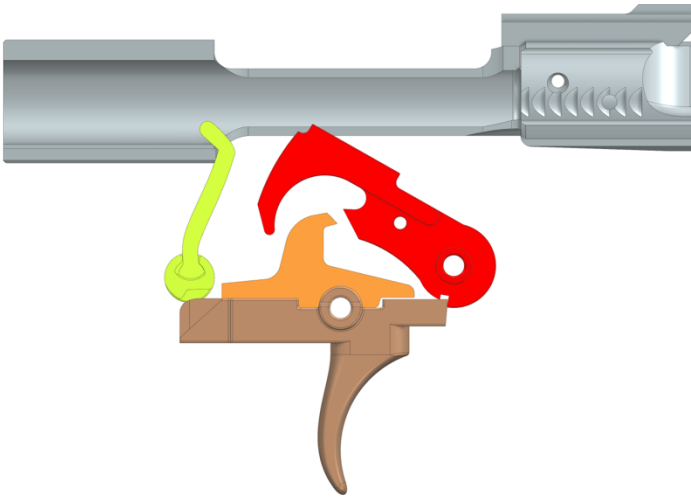
'247 Patent Claim 15	The Super Safety
15. A firearm trigger mechanism comprising:	When installed and used as directed, the Super Safety is part of a forced reset trigger mechanism and functions as a cam that in at least one mode, both forces the reset of the trigger and locks the trigger during the cycle of operation.

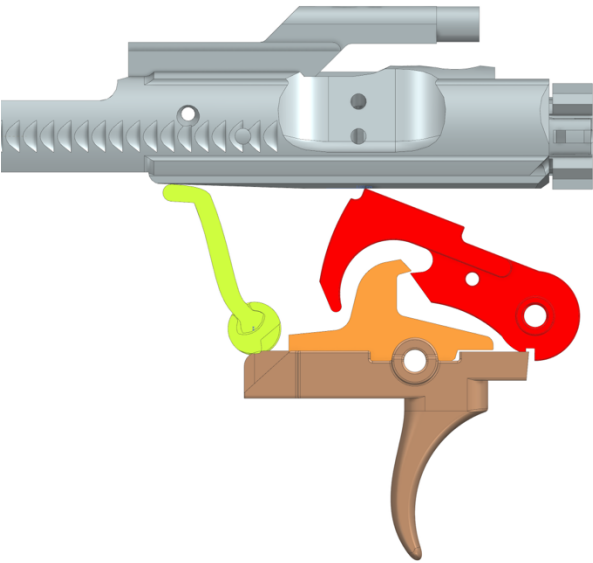
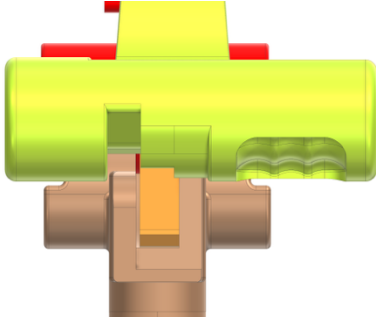
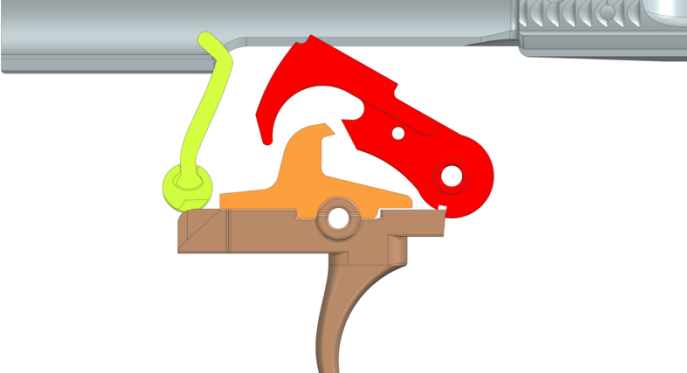
'247 Patent Claim 15	The Super Safety
	 The Super Safety www.80-lower.com/products/hoffman-super-safety-for-ar-15-w-pre-cut-trigger-curved/
a hammer having a sear catch and a hook for engaging a disconnecter and adapted to be mounted in a fire control mechanism pocket of a receiver	The Super Safety (yellow) is installed in a fire control mechanism pocket of a receiver along with a hammer (red) that has a sear catch and a hook for engaging a disconnecter (orange).  (Plaintiff-generated renderings of the Super Safety here and below)
to pivot on a transverse hammer pivot axis between set and released positions, said hammer adapted to be pivoted rearward by	The hammer (red) pivots on a transverse hammer pivot axis between set and released positions, depicted below. The hammer is adapted to be pivoted rearward by rearward movement of a bolt carrier.

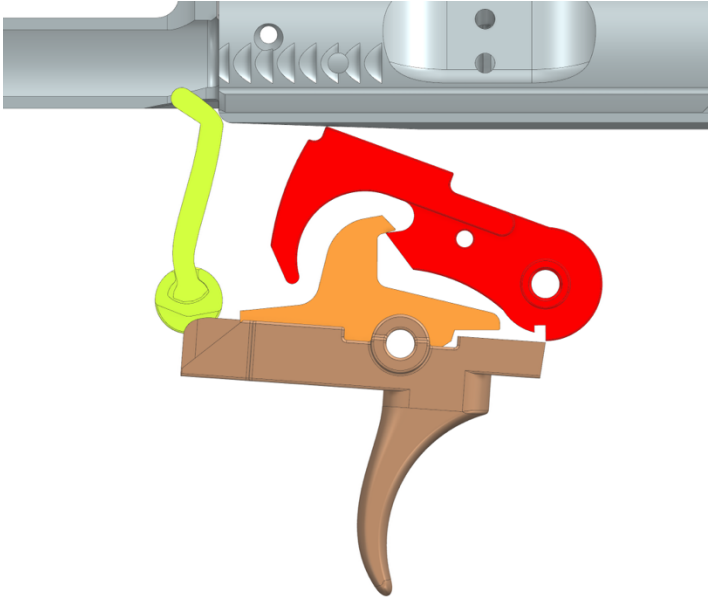
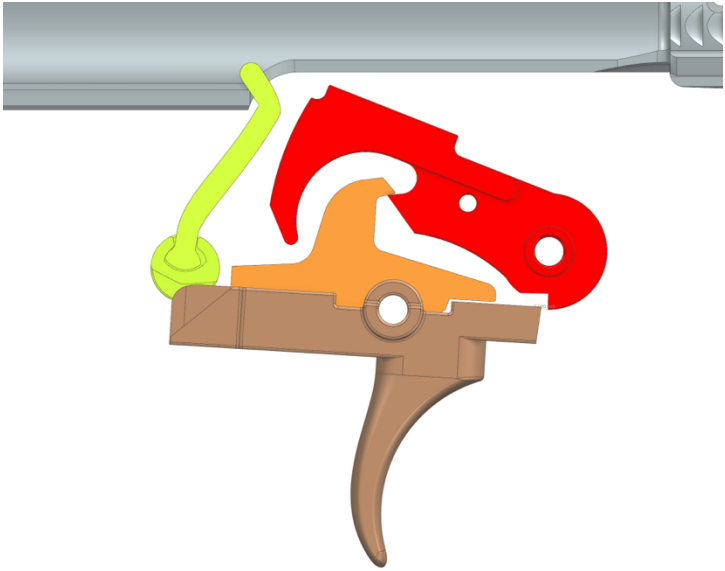
'247 Patent Claim 15	The Super Safety
rearward movement of a bolt carrier,	 Hammer Set Position  Hammer Released Position
a trigger member having a sear and adapted to be mounted in the fire control mechanism pocket to pivot on a transverse trigger member pivot axis between set and released positions,	The Super Safety (yellow) is installed with a trigger member (brown) in the fire control mechanism pocket and the trigger member pivots on a transverse trigger member pivot axis between set and released positions. The trigger member (brown) has a sear.

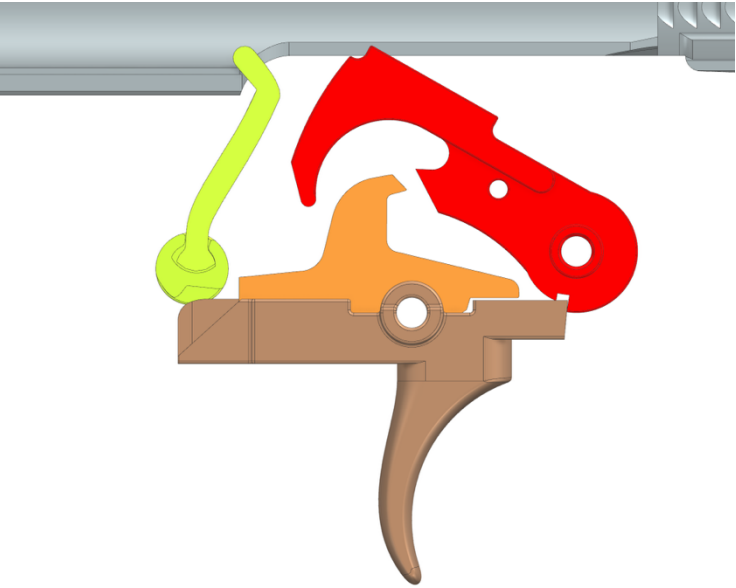
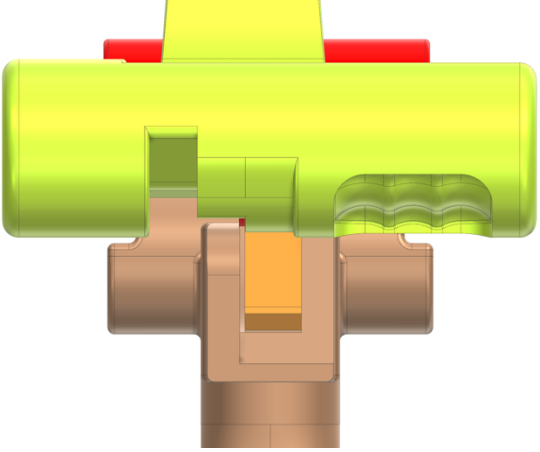
'247 Patent Claim 15	The Super Safety
	
wherein said sear and sear catch are in engagement in said set positions of said hammer and trigger member	The sear of the trigger member (brown) and sear catch of the hammer (red) are in engagement when the hammer and trigger member are in their set positions.  Trigger Member Set Position
and are out of engagement in said released positions of said hammer and trigger member,	The sear of the trigger member (brown) and sear catch of the hammer (red) are out of engagement in the released position.

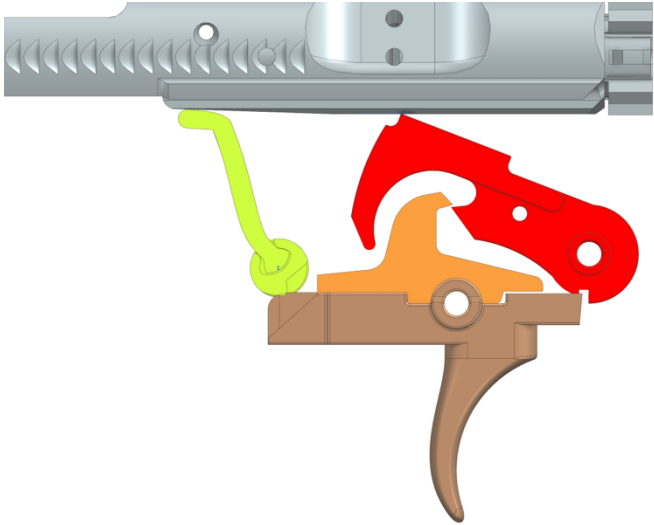
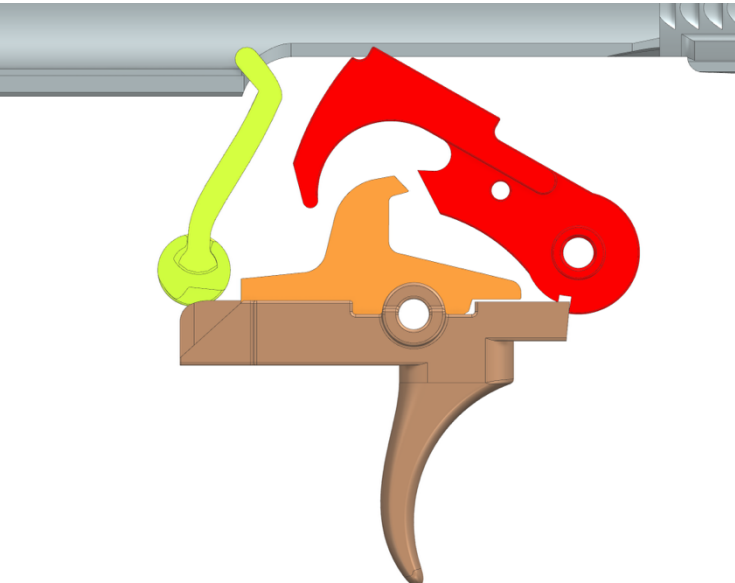
'247 Patent Claim 15	The Super Safety
	 Trigger Member Released Position
said disconnecter having a hook for engaging said hammer and adapted to be mounted in the fire control mechanism pocket to pivot on a transverse disconnecter pivot axis,	The disconnecter (orange) is adapted to be mounted in the fire control mechanism pocket to pivot on a transverse disconnecter pivot axis. The disconnecter has a hook for engaging the hammer (red).  Disconnecter Hook Engaged
and a cam having a cam lobe and adapted to be movably mounted in the	The Super Safety has a cam with a cam lobe and lever that is adapted to be movably mounted in the fire control mechanism pocket. (See image above depicting Super Safety, shown in yellow, in fire control mechanism pocket)

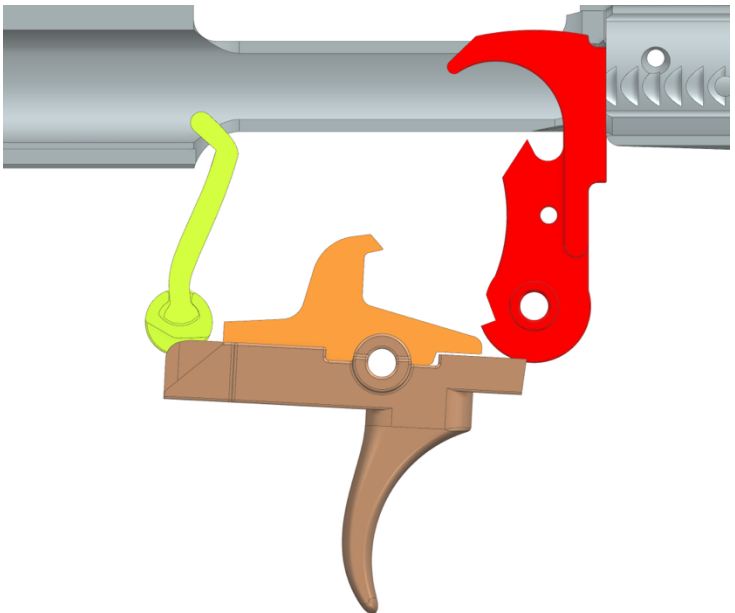
'247 Patent Claim 15	The Super Safety
fire control mechanism pocket,	 Super Safety Cam with Lobe and Lever
said cam being movable between a first position and a second position, in said second position said cam lobe forces said trigger member towards said set position,	The cam is movable between a first position and a second position.  Cam and Lobe First Position In the second position, the cam lobe forces the trigger member (brown) toward the set position when the cam is in the forced reset semi-automatic mode.

'247 Patent Claim 15	The Super Safety
	 Cam and Lobe Second Position
whereupon in a standard semi-automatic mode, said cam is in said first position,	During at least part of the cycle in the standard semi-automatic mode,  . . . the cam is in the first position. 

'247 Patent Claim 15	The Super Safety
rearward movement of the bolt carrier causes rearward pivoting of said hammer such that said disconnecter hook catches said hammer hook, and thereafter the bolt carrier moves forward into battery, at which time a user must manually release said trigger member to free said hammer from said disconnecter to permit said	Rearward movement of the bolt carrier causes rearward pivoting of the hammer (red) such that the disconnecter (orange) hook catches the hammer hook.  Thereafter, the bolt carrier moves forward into battery,  . . . at which time a user must manually release the trigger member (brown) to free said hammer (red) from the disconnecter (orange) to permit the hammer and trigger member

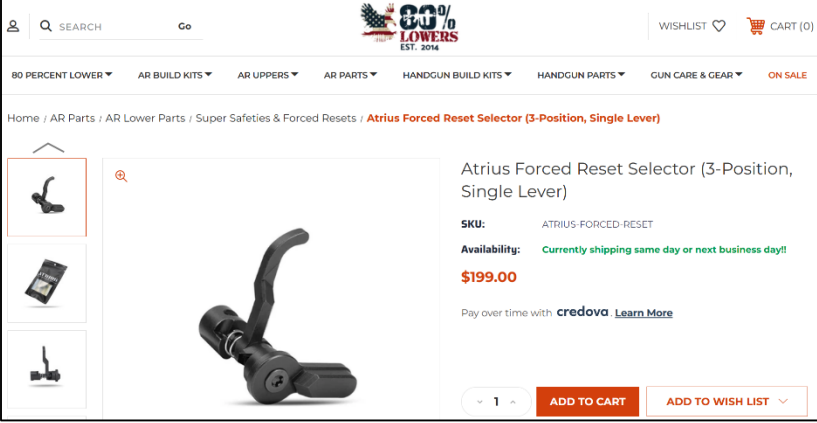
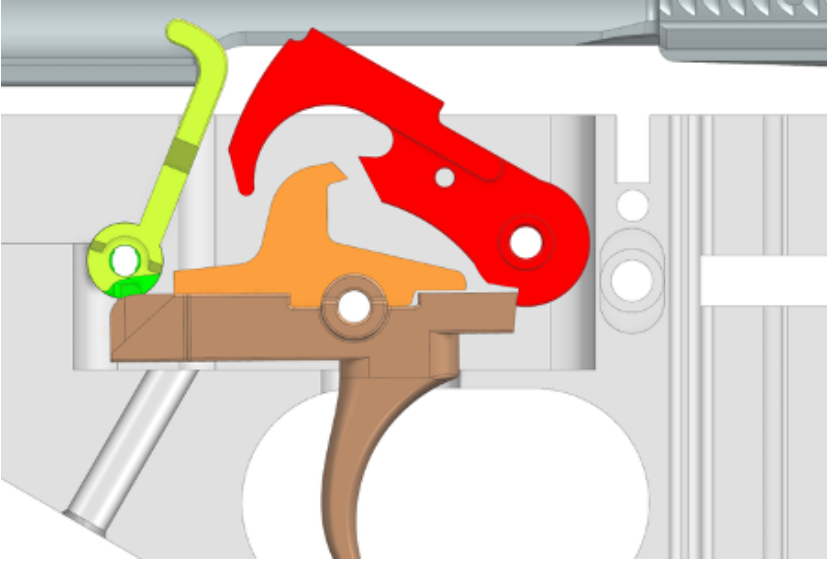
'247 Patent Claim 15	The Super Safety
hammer and trigger member to pivot to said set positions so that the user can pull said trigger member to fire the firearm, and	to pivot to the set positions so that the user can pull the trigger member to fire the firearm. 
whereupon in a forced reset semi-automatic mode, said cam is in said second position, rearward movement of the bolt carrier causes rearward pivoting of said hammer such that said disconnector hook is prevented from catching said hammer hook,	When in the forced reset semi-automatic mode,  . . . the cam is in the second position during at least part of the cycle and forces the trigger member toward the set position. Rearward movement of the bolt carrier causes rearward pivoting of the hammer (red) such that the disconnector (orange) hook is prevented from catching the hammer hook.

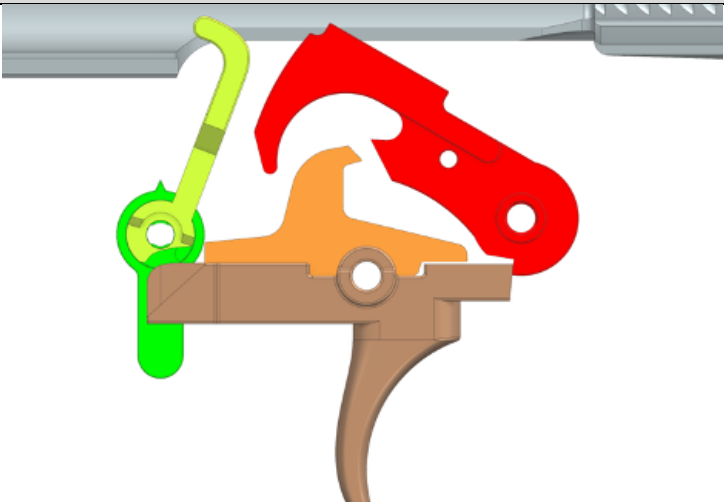
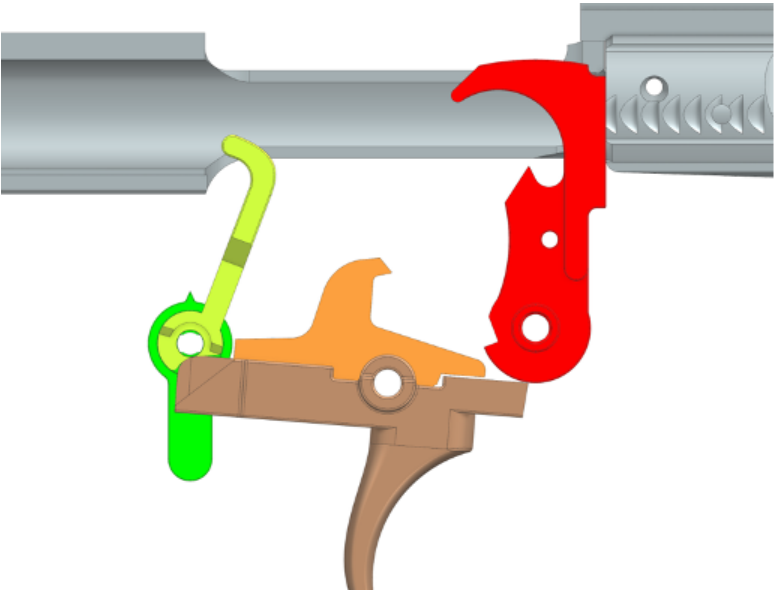
'247 Patent Claim 15	The Super Safety
	 A cross-sectional diagram of a firearm's bolt carrier assembly. The bolt carrier (grey) is at the rear. A green wire (the Super Safety) is connected to the bolt carrier and a red lever (the trigger member). The red lever is in a retracted position, blocking the trigger member (brown) from moving forward.
and thereafter the bolt carrier moves forward into battery,	Thereafter, the bolt carrier moves forward into battery,  A cross-sectional diagram of the same firearm mechanism. The bolt carrier (grey) has moved forward into battery. The green wire (the Super Safety) is now in a position that allows the red lever (the trigger member) to move forward, enabling the trigger member (brown) to be pulled.
at which time the user can pull said trigger member to fire the firearm.	. . . at which time the user can pull the trigger member (brown) to fire the firearm.

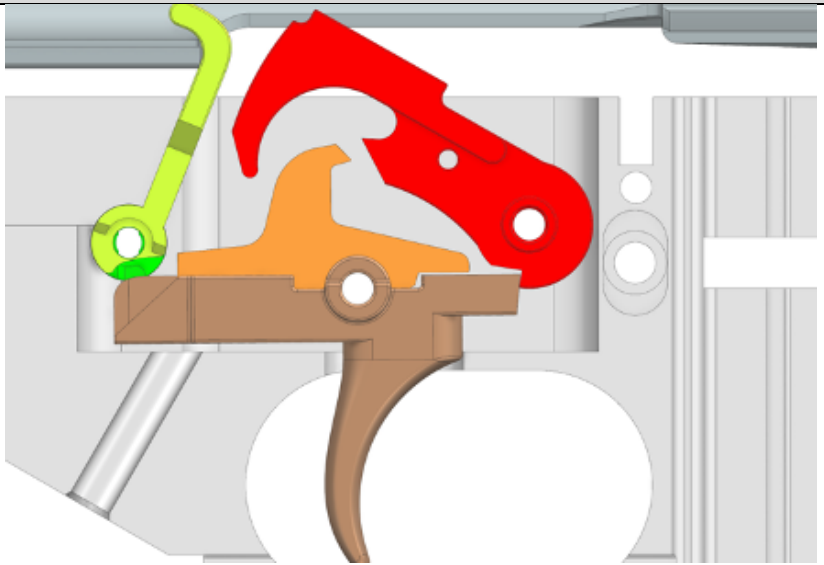
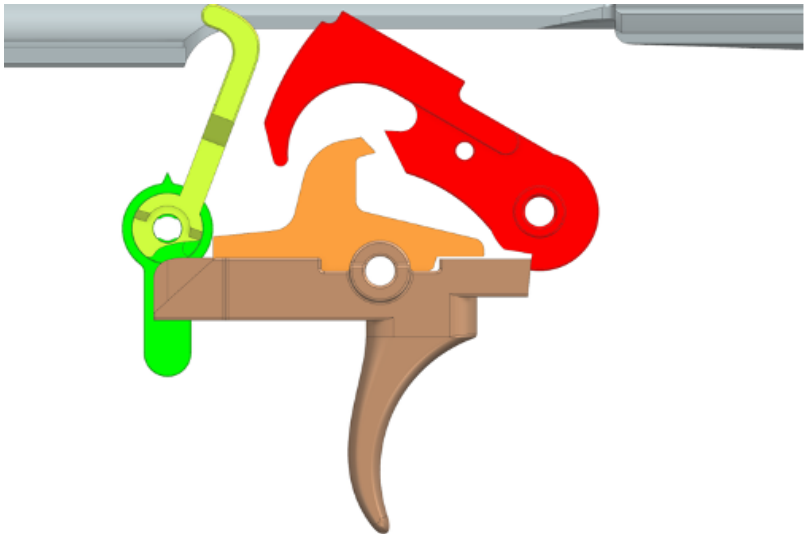
'247 Patent Claim 15	The Super Safety
	

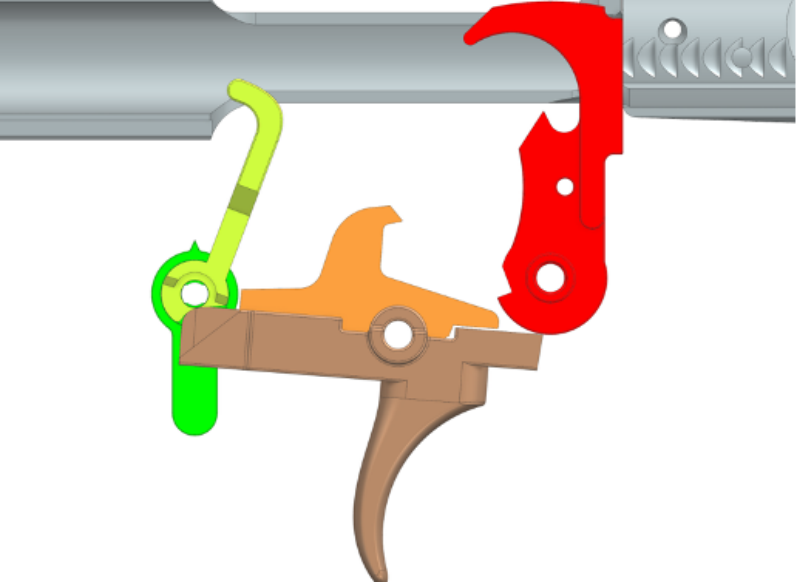
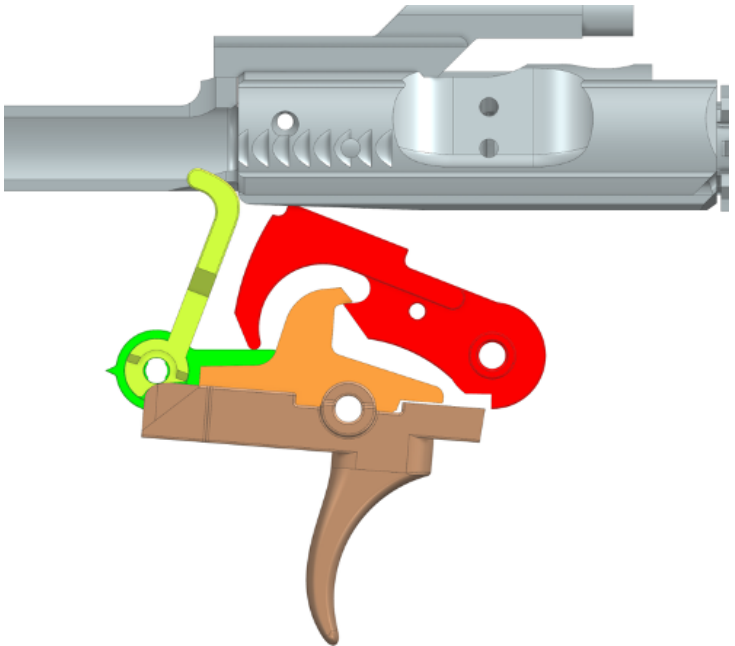
38. An exemplary comparison of the Atrius Selector, when assembled and used as intended, with claim 15 of the '247 Patent, is illustrated in the chart below:

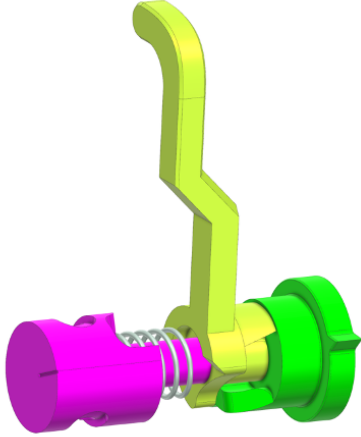
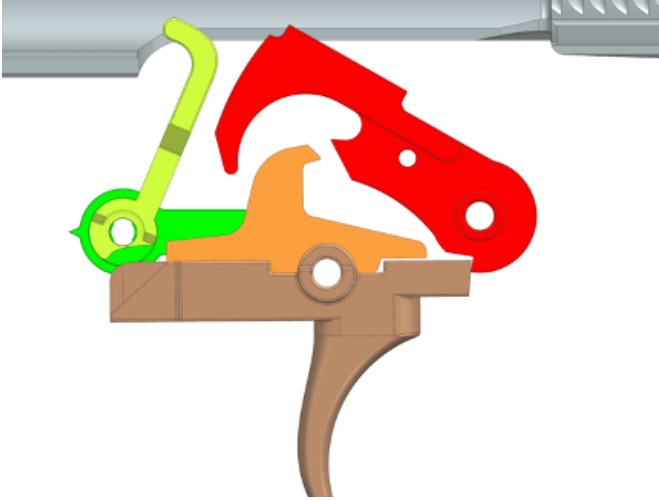
'247 Patent Claim 15	The Atrius Selector
15. A firearm trigger mechanism comprising:	When installed and used as directed, the Atrius Selector is part of a forced reset trigger mechanism and functions as a cam that in at least one mode, both forces the reset of the trigger and locks the trigger during the cycle of operation.  Atrius Selector

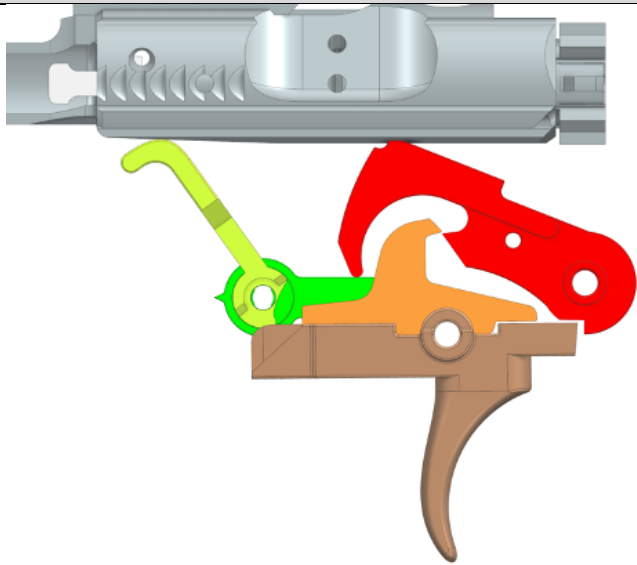
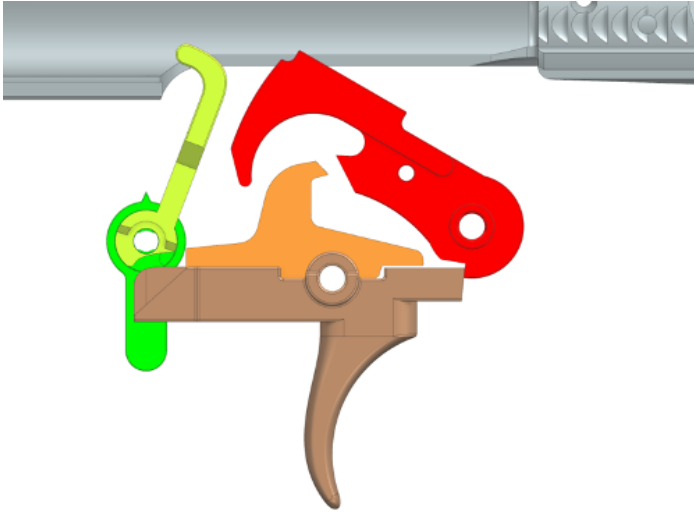
'247 Patent Claim 15	The Atrius Selector
	 www.80-lower.com/products/atrus-forced-reset-selector-3-position-single-lever/
a hammer having a sear catch and a hook for engaging a disconnecter and adapted to be mounted in a fire control mechanism pocket of a receiver	The Atrius Selector (yellow) is installed in a fire control mechanism pocket of a receiver along with a hammer (red) that has a sear catch and a hook for engaging a disconnecter (orange).  (Plaintiff-generated renderings of Atrius Selector here and below)
to pivot on a transverse hammer pivot axis between set and released positions, said hammer adapted to be pivoted rearward by	The hammer (red) pivots on a transverse hammer pivot axis between set and released positions, depicted below. The hammer is adapted to be pivoted rearward by rearward movement of a bolt carrier.

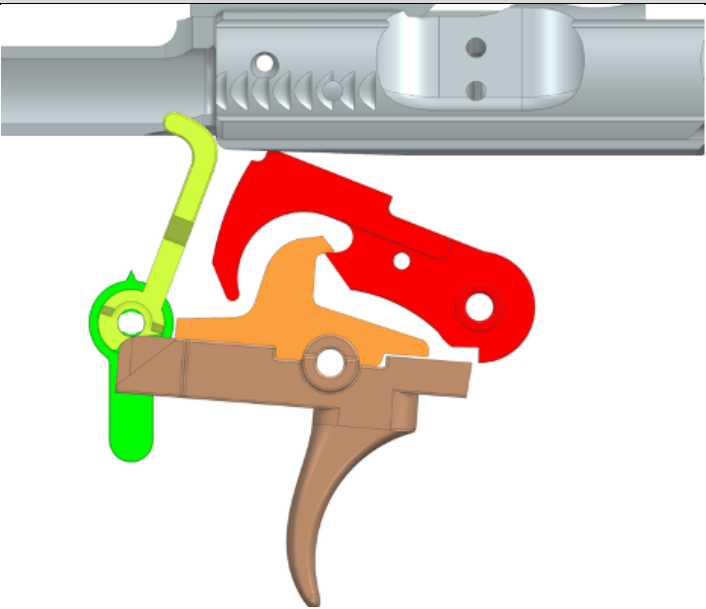
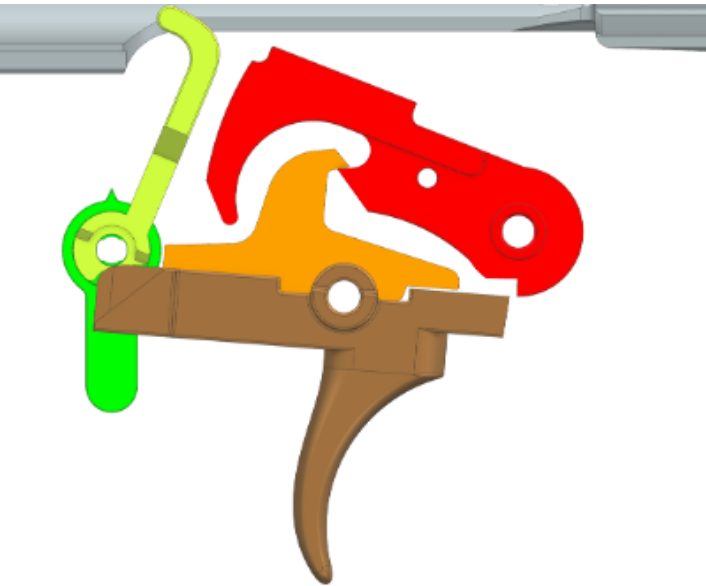
'247 Patent Claim 15	The Atrius Selector
rearward movement of a bolt carrier,	 Hammer Set Position  Hammer Released Position
a trigger member having a sear and adapted to be mounted in the fire control mechanism pocket to pivot on a transverse trigger member pivot axis between set and released positions,	The Atrius Selector (yellow) is installed with a trigger member (brown) in the fire control mechanism pocket that pivots on a transverse trigger member pivot axis between set and released positions and has a sear. The trigger member (brown) has a sear.

'247 Patent Claim 15	The Atrius Selector
	
wherein said sear and sear catch are in engagement in said set positions of said hammer and trigger member	The sear of the trigger member (brown) and sear catch of the hammer (red) are in engagement when the hammer and trigger member are in their set positions.  Trigger Member Set Position
and are out of engagement in said released positions of said hammer and trigger member,	The sear of the trigger member (brown) and sear catch of the hammer (red) are out of engagement in the released position.

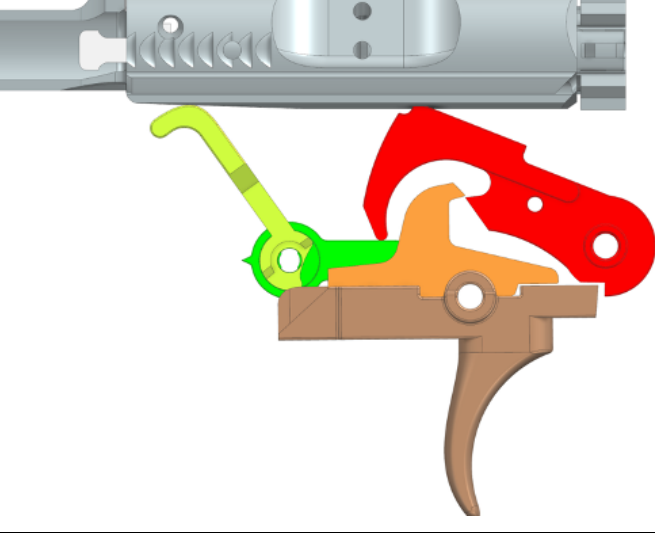
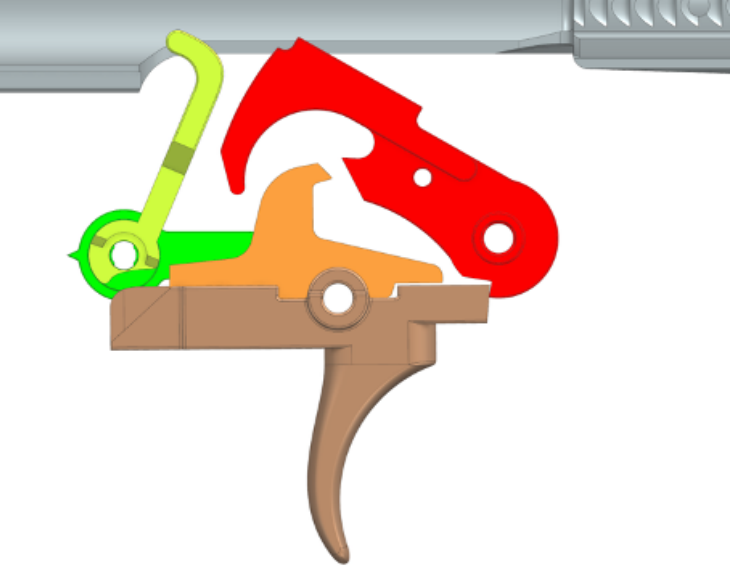
'247 Patent Claim 15	The Atrius Selector
	 Trigger Member Released Position
said disconnecter having a hook for engaging said hammer and adapted to be mounted in the fire control mechanism pocket to pivot on a transverse disconnecter pivot axis,	The disconnecter (orange) is adapted to be mounted in the fire control mechanism pocket to pivot on a transverse disconnecter pivot axis. The disconnecter has a hook for engaging the hammer (red).  Disconnecter Hook Engaged
and a cam having a cam lobe and adapted to be movably mounted in the	The Atrius Selector has a cam and lever that is adapted to be movably mounted in the fire control mechanism pocket. (See image above depicting Atrius Selector, shown in yellow, in fire control mechanism pocket)

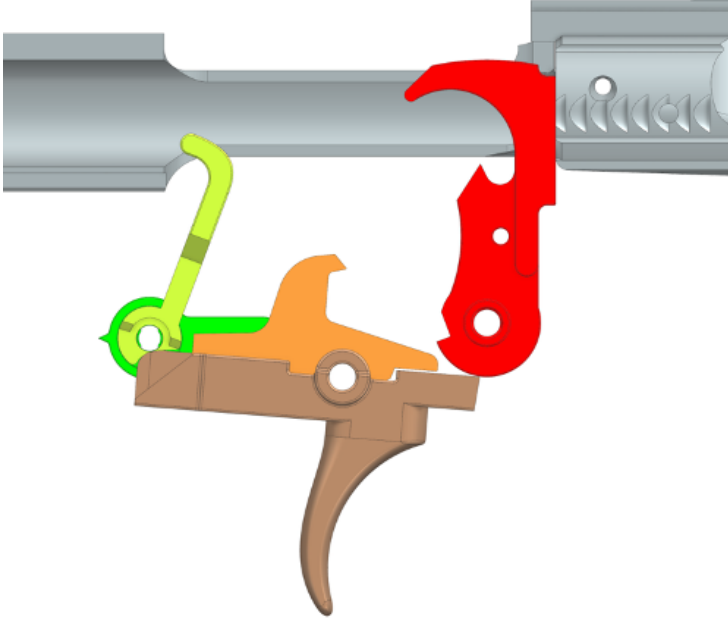
'247 Patent Claim 15	The Atrius Selector
fire control mechanism pocket,	 Atrius Super Selector Cam with Lobe and Lever
said cam being movable between a first position and a second position, in said second position said cam lobe forces said trigger member towards said set position,	The cam is movable between a first position and a second position.  Cam and Lobe First Position In the second position, the cam lobe forces the trigger member (brown) toward the set position when the cam is in the forced reset semi-automatic mode.

'247 Patent Claim 15	The Atrius Selector
	 Cam and Lobe Second Position
whereupon in a standard semi-automatic mode, said cam is in said first position,	During at least part of the cycle in the standard semi-automatic mode, the cam is in the first position. 
rearward movement of the bolt carrier causes rearward pivoting of said hammer such that said disconnector hook catches said hammer hook,	Rearward movement of the bolt carrier causes rearward pivoting of the hammer (red) such that the disconnector (orange) hook catches the hammer hook.

'247 Patent Claim 15	The Atrius Selector
	
and thereafter the bolt carrier moves forward into battery,	Thereafter, the bolt carrier moves forward into battery, 
at which time a user must manually release said trigger member to free said hammer from said disconnector to permit said hammer and trigger member to pivot to said set positions so that the user can pull said trigger	. . . at this time a user must manually release the trigger member (brown) to free said hammer (red) from the disconnector (orange) to permit the hammer and trigger member to pivot to the set positions so that the user can pull the trigger member to fire the firearm

'247 Patent Claim 15	The Atrius Selector
member to fire the firearm, and	
whereupon in a forced reset semi-automatic mode,	
said cam is in said second position, rearward movement of the bolt carrier causes rearward pivoting of said hammer such that said disconnector hook is prevented from catching said hammer hook,	The cam is in the second position during at least part of the cycle and forces the trigger member toward the set position. Rearward movement of the bolt carrier causes rearward pivoting of the hammer (red) such that the disconnector (orange) hook is prevented from catching the hammer hook.

'247 Patent Claim 15	The Atrius Selector
	 A cross-sectional diagram of a firearm's bolt carrier assembly. The bolt carrier is shown in a retracted position, with a green hook-like component (the Atrius Selector) engaged with a red component. The trigger member is brown and is in a retracted position.
and thereafter the bolt carrier moves forward into battery,	Thereafter, the bolt carrier moves forward into battery,  A cross-sectional diagram of the same bolt carrier assembly. The bolt carrier has moved forward into battery, and the green Atrius Selector component is now disengaged from the red component. The trigger member remains in its retracted position.
at which time the user can pull said trigger member to fire the firearm.	. . . at which time the user can pull said trigger member (brown) to fire the firearm.

'247 Patent Claim 15	The Atrius Selector
	

39. On information and belief, in addition to direct infringement, Defendant takes active steps to induce others, including its customers, to directly infringe the '247 patent. Defendant takes such active steps knowing that those steps will induce, encourage, and facilitate direct infringement by others. Such active steps include, but are not limited to, installation of, encouraging, advertising, promoting, and instructing others to use and/or how to use the Super Safety, Atrius Selector, and ARC-Fire. Examples of this is the promotional material found on Defendant's website informs customers to install the Infringing Devices into an AR15:

Super Safety:

Super Safety Installation

1. Remove hammer and trigger pins.
2. Remove hammer, trigger, and disconnecter.
3. Uninstall original safety: Un-bolt the pistol grip. Remove safety detent and spring.
4. Install the Hoffman safety lever and its new detent. Reuse the safety detent spring.
5. Install the new trigger using your original disconnecter, trigger pin, and trigger spring.
6. Reinstall your hammer with its original hammer pin and hammer spring.
7. You're done! Hit the range! (R.I.P. your wallet)

Atrius Selector:

Selector Installation & Function

The Atrius Selector installs like any other AR-15 safety lever, utilizing the original safety lever hole, detent, and spring. The selector's screw should be tightened with blue Loctite and torqued to 15 in.-lbs. (1.7 Nm) with a T10 Torx bit. When installed properly, the curved tip of the Selector's cam lever should face rearward, toward the buffer.

40. On information and belief, Defendant knows or should know that such activities induce others to directly infringe at least claim 15 of the '247 Patent.

41. On information and belief, Defendant also contributes to the infringement of the '247 Patent by others, including its customers. Acts by Defendant that contribute to the infringement of others include, but are not limited to, the sale, offer for sale, and/or importation by Defendant of the components of the Super Safety, Atrius Selector, and ARC-Fire, such as the cam or cam lever arm. The components are not suitable for substantial noninfringing use as they are specially designed and adapted to be used in a fire control unit to forcibly reset a trigger mechanism and infringe the '247 Patent.

42. Defendant has engaged in egregious infringement behavior with knowledge of the '247 Patent, which has been duly issued by the USPTO, and is presumed valid. On information and belief, Defendant has known or should have known that its actions constituted and continue to constitute infringement of the '247 Patent and that the '247 Patent is valid at least through the service of this complaint. Defendant could not reasonably or subjectively believe that its actions do not constitute infringement of the '247 Patent, nor could it reasonably or subjectively believe that the patent is invalid. Despite that knowledge and subjective belief, and the objectively high likelihood that its actions constitute infringement, Defendant has continued its infringing activities. As such, Defendant willfully infringes the '247 Patent.

43. By its actions, Defendant has injured Plaintiffs and is liable to Plaintiffs for infringement of the '247 Patent pursuant to 35 U.S.C. § 271.

44. By its actions, Defendant's infringement of the '247 Patent has irreparably injured Plaintiffs. Unless such infringing acts are enjoined by this Court, Plaintiffs will continue to suffer additional irreparable injury.

45. By its actions, Defendant's infringement of the '247 Patent has damaged and continues to damage Plaintiffs in an amount yet to be determined.

46. Defendant's infringement of the '247 patent is exceptional and entitles Plaintiffs to attorneys' fees and costs incurred in prosecuting this action under 35 U.S.C. § 285.

47. Defendant's acts of infringement are willful and for no other purpose than to deliberately and irreparably harm Plaintiffs' business, sales, reputation, and good-will.

48. Plaintiffs have been substantially harmed by Defendant's infringing activities and are entitled to relief including but not limited to a preliminary injunction, a permanent injunction, damages adequate to compensate for the infringement, being lost profits or no less than a reasonable royalty, treble damages, and attorneys' fees.

COUNT II – INFRINGEMENT OF THE '784 PATENT

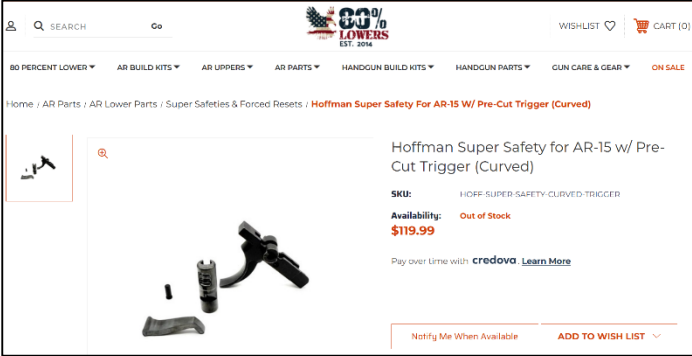
49. Plaintiffs re-allege and incorporate the allegations of the preceding paragraphs as if fully set forth herein.

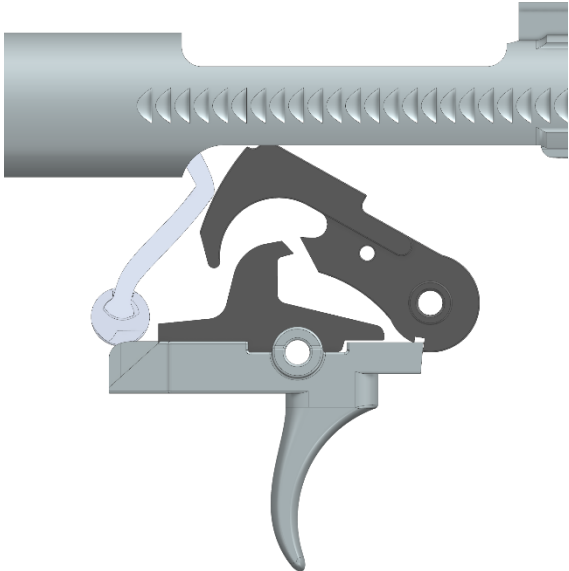
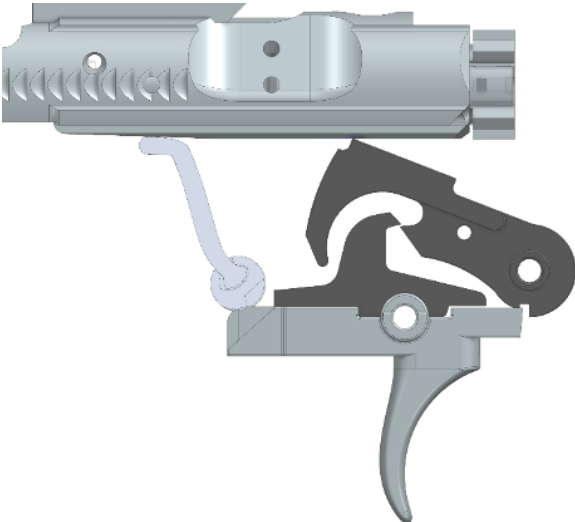
50. In violation of 35 U.S.C. § 271, Defendant has infringed, induced others to infringe, and/or contributed to the infringement of one or more claims of the '784 patent, including but not limited to claim 1, literally and/or under the doctrine of equivalents, by among other things, making, using, offering for sale, selling, and/or importing into the United States unlicensed

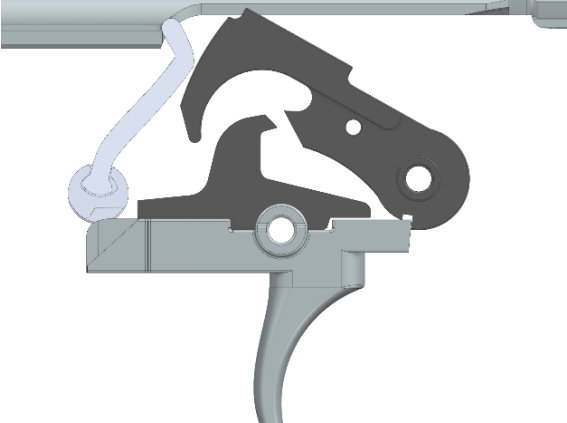
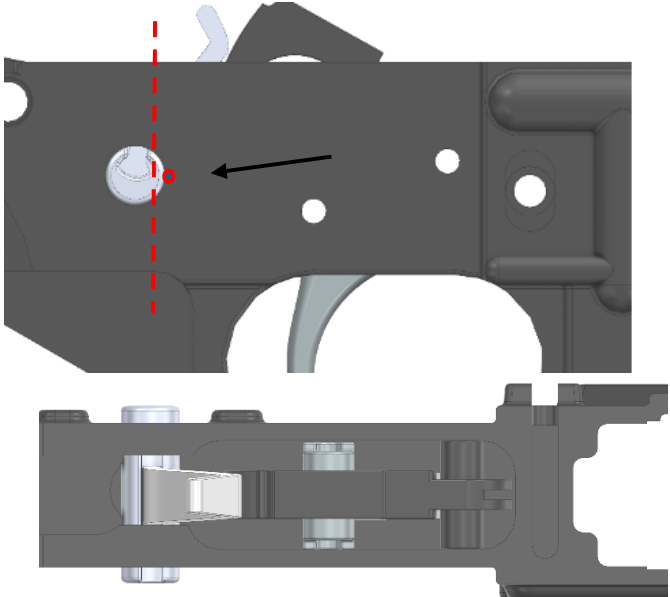
products in a manner that infringes the '784 patent. Such unlicensed products include the Super Safety, Atrius Selector, and ARC-Fire.

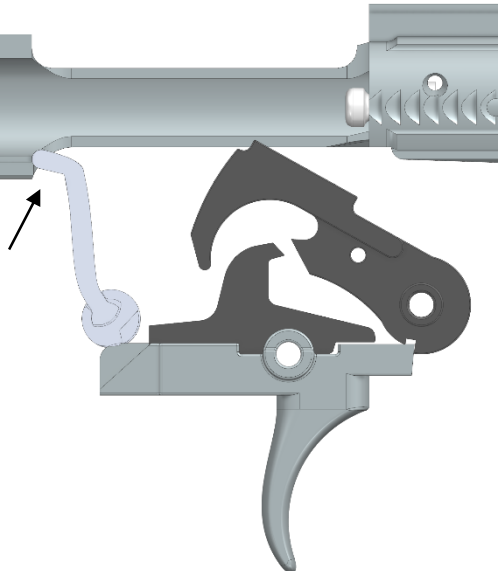
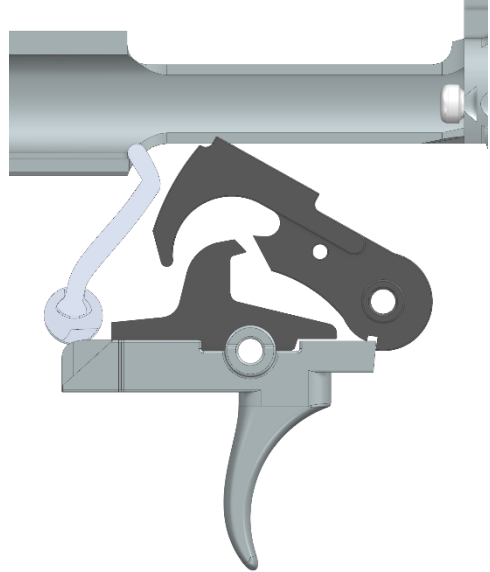
51. On information and belief, Defendant has and continues to willfully infringe, induce others to infringe, and/or contribute to the infringement of one or more claims of the '784 patent, including but not limited to claim 1, literally and/or under the doctrine of equivalents.

52. An exemplary comparison of the Super Safety, when assembled and used as intended, with claim 1 of the '784 Patent is illustrated in the chart below:

'784 Patent Claim 1	The Super Safety
1. In a forced reset trigger mechanism, an extended trigger member locking device, comprising:	When installed and used as directed, the Super Safety is part of a forced reset trigger mechanism and functions as an extended trigger member locking device.  Super Safety www.80-lower.com/products/hoffman-super-safety-for-ar-15-w-pre-cut-trigger-curved/

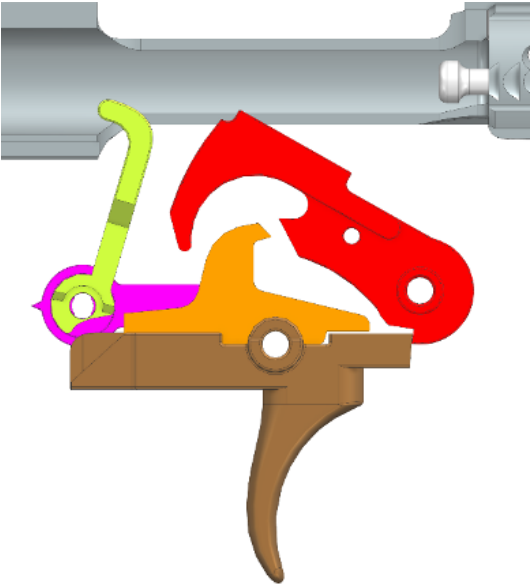
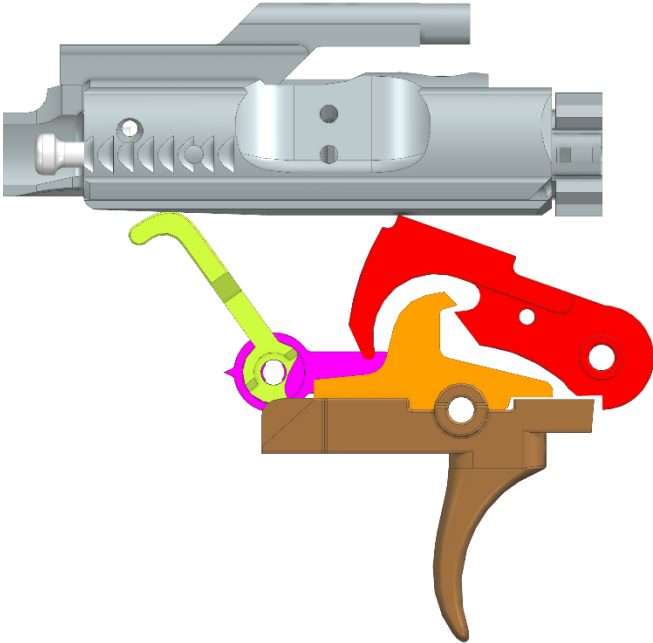
'784 Patent Claim 1	The Super Safety
	 Super Safety Installed (Plaintiff-generated renderings of Super Safety here and below; Locking member and bolt carrier shown here and below in section view for clarity)
a locking member that is movable between a first position in which it locks a trigger against pulling movement	The Super Safety operates as a locking member and has a first position in which the Super Safety locks the trigger member against pulling movement.  Locked First Position
and a second position where it does not restrict movement of the trigger member,	The Super Safety is moveable from the first position to a second position where it does not restrict movement of the trigger member.

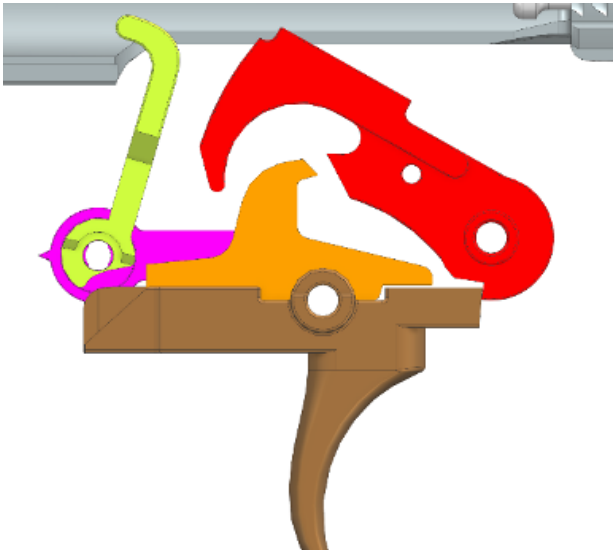
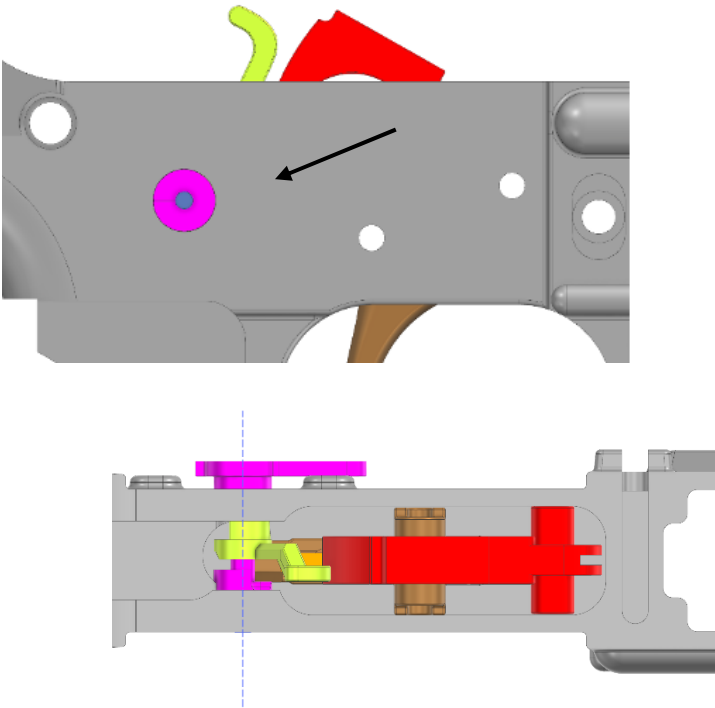
'784 Patent Claim 1	The Super Safety
	 Unlocked Second Position
the locking member configured to be movably supported by a frame	The Super Safety is movably (pivotaly about the axis depicted below) supported by a frame (the lower receiver). 
and including a generally upward extension portion configured to make actuating contact with a surface of the bolt carrier,	The Super Safety has an upward extending portion (lever arm) configured to make actuating contact with a surface of the bolt carrier.

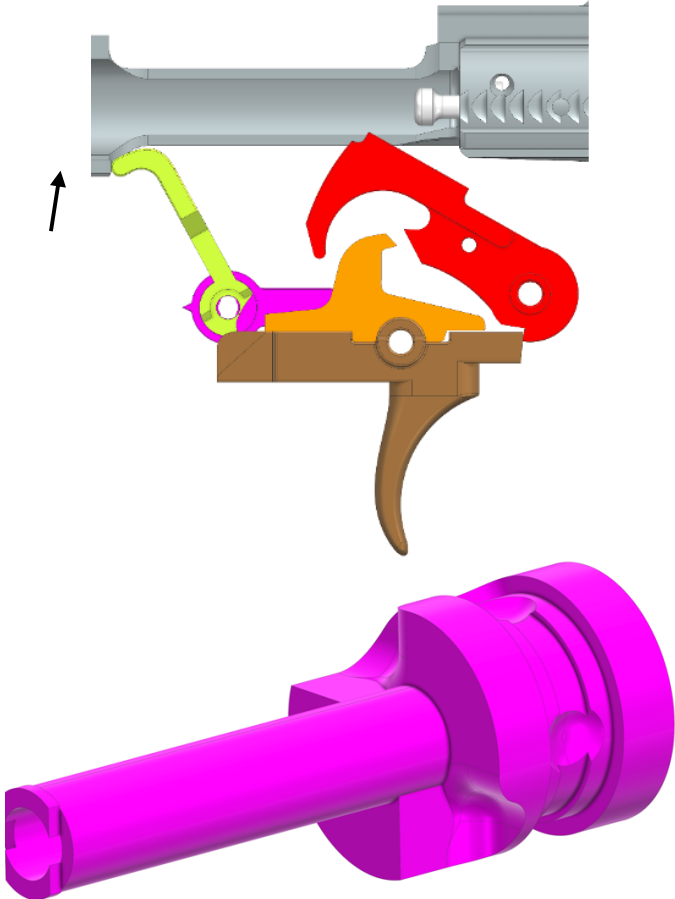
'784 Patent Claim 1	The Super Safety
	
such actuating contact causing the locking member to move from the first position to the second position,	The actuating contact causes the locking member to move from the first position to the second position.  Unlocked Second Position

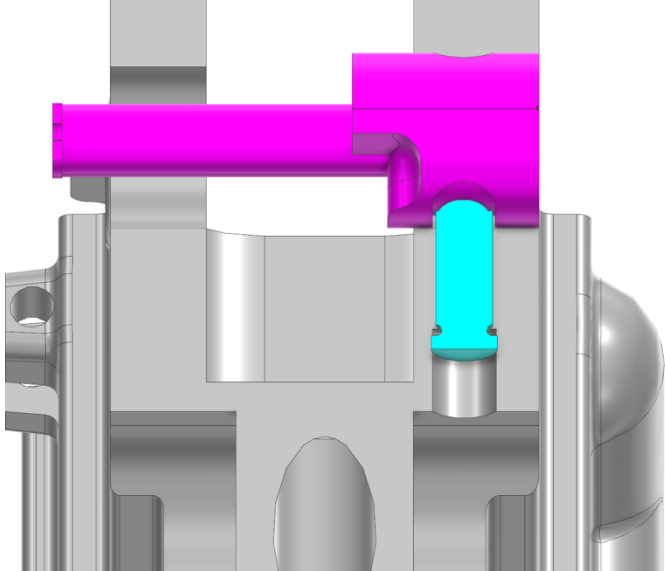
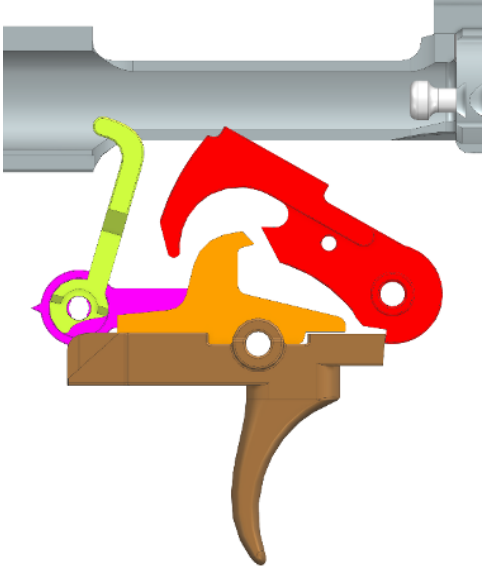
53. An exemplary comparison of the Atrius Selector, when assembled and used as intended, with claim 1 of the '784 Patent is illustrated in the chart below:

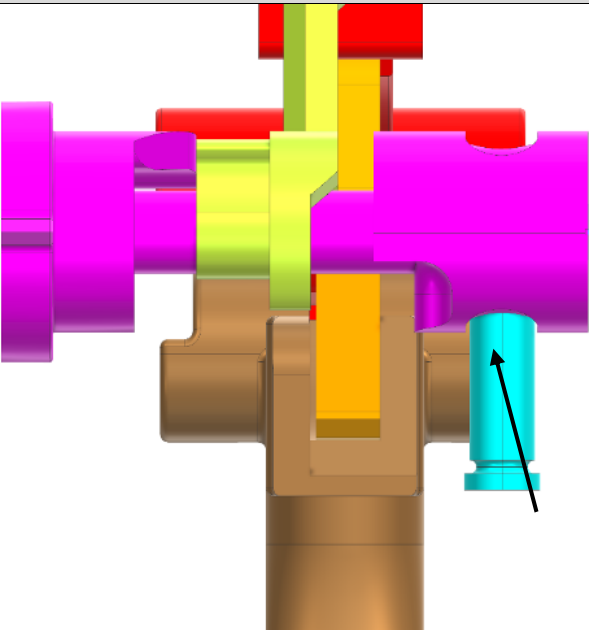
'784 Patent Claim 1	The Atrius Selector
1. In a forced reset trigger mechanism, an extended trigger member locking device, comprising:	When installed and used as directed, the Atrius Selector is part of a forced reset trigger mechanism and functions as an extended trigger member locking device. Atrius Selector www.80-lower.com/products/atrus-forced-reset-selector-3-position-single-lever/

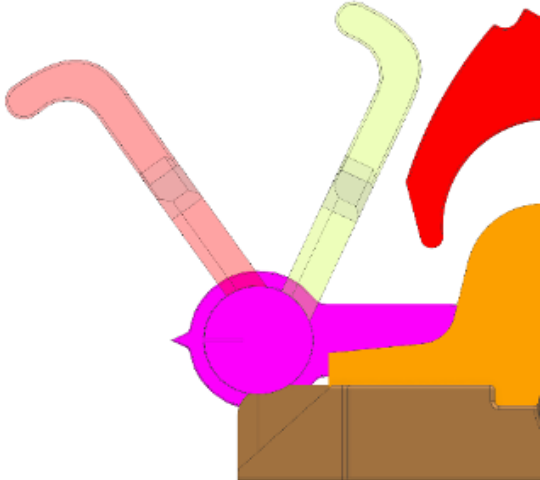
'784 Patent Claim 1	The Atrius Selector
	 Atrius Selector Installed (Plaintiff-generated renderings of Atrius Selector here and below; Locking member and bolt carrier shown here and below in section view for clarity)
a locking member that is movable between a first position in which it locks a trigger against pulling movement	The Atrius Selector operates as a locking member and has a first position in which it locks the trigger member against pulling movement.  Locked First Position

'784 Patent Claim 1	The Atrius Selector
and a second position where it does not restrict movement of the trigger member,	The Atrius Selector is moveable from the first position to a second position where it does not restrict movement of the trigger member.  Unlocked Second Position
the locking member configured to be movably supported by a frame	The Atrius Selector is movably (pivotally about the axis depicted below) supported by a frame (the lower receiver). 

'784 Patent Claim 1	The Atrius Selector
and including a generally upward extension portion configured to make actuating contact with a surface of the bolt carrier,	The Atrius Selector has an upward extending portion (yellow lever arm) configured to make actuating contact with a surface of the bolt carrier.  The body portion (purple) has a track with holes that are lined up to correspond to the selectable modes (Fire/ Standard Semi-Automatic, Forced Reset Semi-Automatic) which are positively stopped by a detent (blue)

'784 Patent Claim 1	The Atrius Selector
	 (section view of body portion (purple), lower receiver (grey), and detent (blue) for clarity) Once installed, the body portion (purple) is movably supported by the lower receiver (grey) using the detent (blue).
such actuating contact causing the locking member to move from the first position to the second position,	The actuation causes the locking member to move from the first position to the second position.  Unlocked Second Position
the locking member having a body portion that is movably supported	The Atrius Selector has a body portion (purple) that is movably supported by the lower receiver.

'784 Patent Claim 1	The Atrius Selector
	
and an upwardly extending deflectable portion that is separately movable relative to the body portion between an extended position	The Atrius Selector has an upwardly extending deflectable portion (lever arm). The connection is designed to allow separate movement of the lever arm relative to the body portion between one position (depicted in red) where it is extended and another position where it is deflected (depicted in yellow).  Below illustrates the upward extending deflectable portion's (lever arm) total separate travel with an overlay of the lever in both positions without the body portion moving.

'784 Patent Claim 1	The Atrius Selector
	
and a deflected position.	The lever is now shown deflected independent of the body. 

54. On information and belief, in addition to direct infringement, Defendant takes active steps to induce others, including its customers, to directly infringe the '784 patent. Defendant takes such active steps knowing that those steps will induce, encourage, and facilitate direct infringement by others. Such active steps include, but are not limited to, installation of, encouraging, advertising, promoting, and instructing others to use and/or how to use the Super Safety, Atrius Selector, and ARC-Fire while selling products. Examples of this is the promotional material found on Defendant's website informs customers to install the Infringing Devices into an AR15:

Super Safety:

Super Safety Installation

1. Remove hammer and trigger pins.
2. Remove hammer, trigger, and disconnecter.
3. Uninstall original safety: Un-bolt the pistol grip. Remove safety detent and spring.
4. Install the Hoffman safety lever and its new detent. Reuse the safety detent spring.
5. Install the new trigger using your original disconnecter, trigger pin, and trigger spring.
6. Reinstall your hammer with its original hammer pin and hammer spring.
7. You're done! Hit the range! (R.I.P. your wallet)

Atrius Selector:

Selector Installation & Function

The Atrius Selector installs like any other AR-15 safety lever, utilizing the original safety lever hole, detent, and spring. The selector's screw should be tightened with blue Loctite and torqued to 15 in.-lbs. (1.7 Nm) with a T10 Torx bit. When installed properly, the curved tip of the Selector's cam lever should face rearward, toward the buffer.

55. On information and belief, Defendant knows or should know that such activities induce others to directly infringe at least claim 1 of the '784 Patent.

56. On information and belief, Defendant also contributes to the infringement of the '784 Patent by others, including its customers. Acts by Defendant that contribute to the infringement of others include, but are not limited to, the sale, offer for sale, and/or importation by Defendant of the components of the Super Safety, Atrius Selector, and ARC-Fire, such as the cam or cam lever arm. The components are not suitable for substantial noninfringing use as they are specially designed and adapted to be used in a fire control unit to forcibly reset a trigger mechanism and infringe the '784 Patent.

57. Defendant has engaged in egregious infringement behavior with knowledge of the '784 Patent, which has been duly issued by the USPTO, and is presumed valid. On information and belief, Defendant knows or should have known that its actions constituted and continue to constitute infringement of the '784 Patent and that the '784 Patent is valid at least through the service of this complaint. Defendant could not reasonably or subjectively believe that its actions

do not constitute infringement of the '784 Patent, nor could it reasonably or subjectively believe that the patent is invalid. Despite that knowledge and subjective belief, and the objectively high likelihood that its actions constitute infringement, Defendant has continued its infringing activities. As such, Defendant willfully infringes the '784 Patent.

58. By its actions, Defendant has injured Plaintiffs and is liable to Plaintiffs for infringement of the '784 Patent pursuant to 35 U.S.C. § 271.

59. By its actions, Defendant's infringement of the '784 Patent has irreparably injured Plaintiffs. Unless such infringing acts are enjoined by this Court, Plaintiffs will continue to suffer additional irreparable injury.

60. By its actions, Defendant's infringement of the '784 Patent has damaged and continues to damage, Plaintiffs in an amount yet to be determined.

61. Defendant's infringement of the '784 patent is exceptional and entitles Plaintiffs to attorneys' fees and costs incurred in prosecuting this action under 35 U.S.C. § 285.

62. Defendant's acts of infringement are willful and for no other purpose than to deliberately and irreparably harm Plaintiffs' business, sales, reputation, and good-will.

63. Plaintiffs have been substantially harmed by Defendant's infringing activities and are entitled to relief including but not limited to a preliminary injunction, a permanent injunction, damages adequate to compensate for the infringement, being lost profits or no less than a reasonable royalty, treble damages, and attorneys' fees.

COUNT III — INFRINGEMENT OF THE '538 PATENT

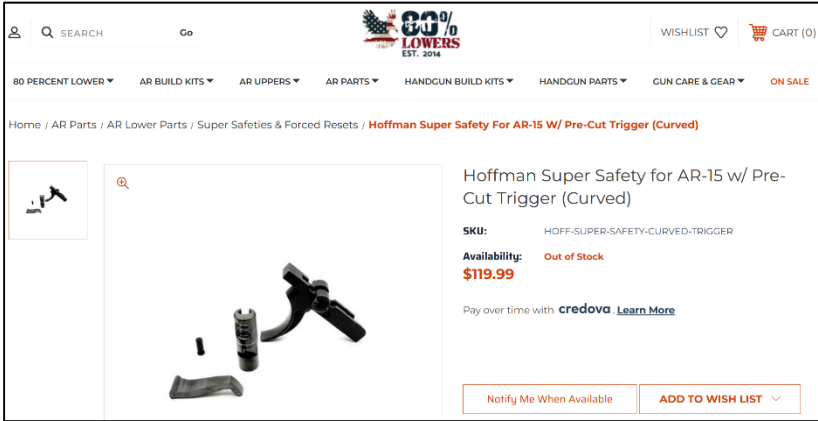
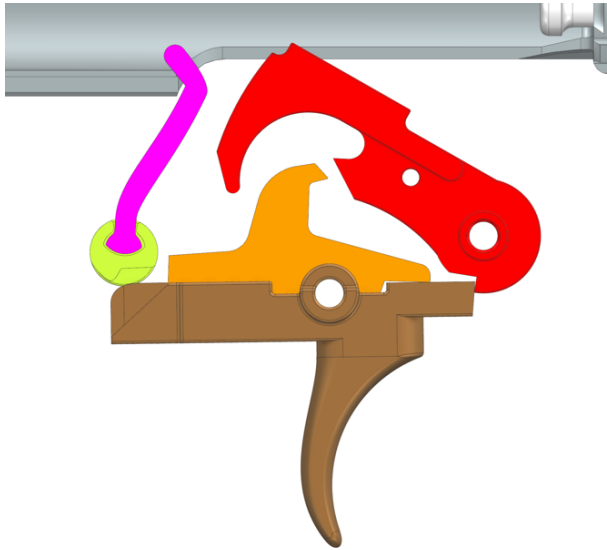
64. Plaintiffs re-allege and incorporate the allegations of the preceding paragraphs as if fully set forth herein.

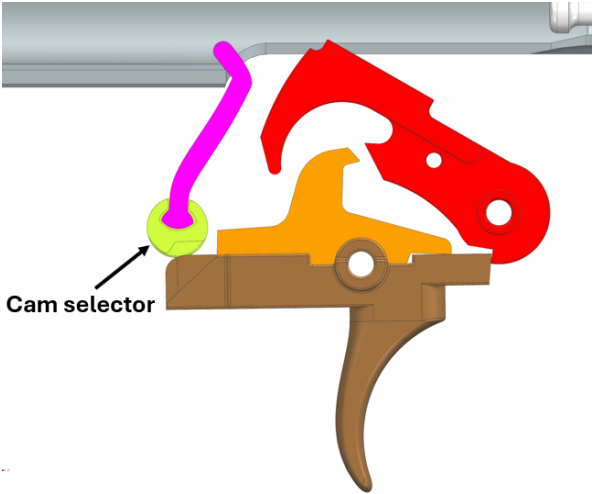
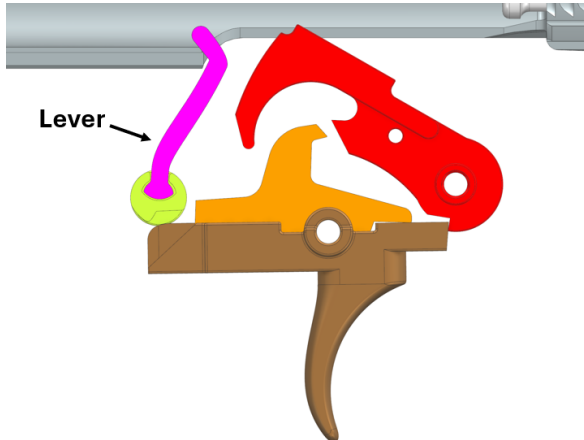
65. In violation of 35 U.S.C. § 271, Defendant has infringed, induced others to infringe, and/or contributed to the infringement of one or more claims of the '538 patent, including but not

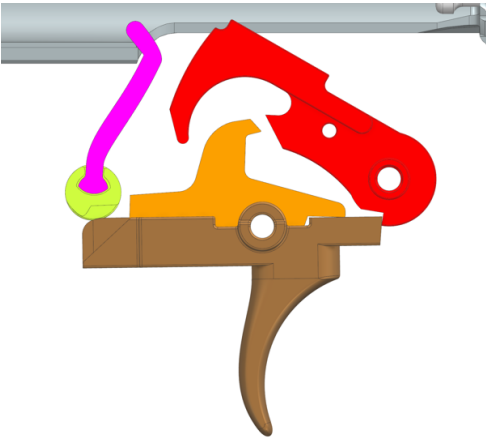
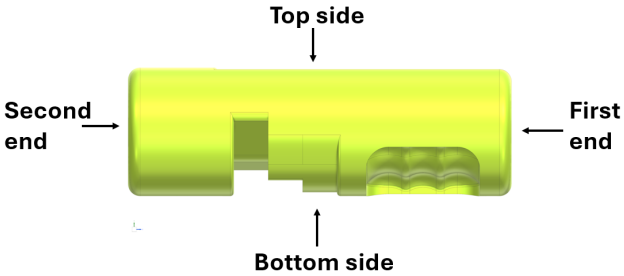
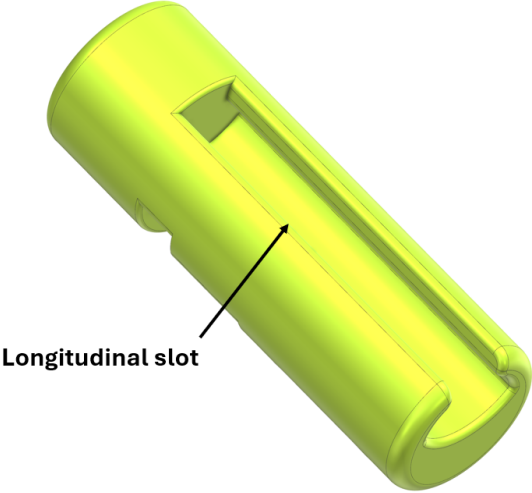
limited to claim 1, literally and/or under the doctrine of equivalents, by among other things, making, using, offering for sale, selling, and/or importing into the United States unlicensed products in a manner that infringes the '538 patent. Such unlicensed products include the Super Safety.

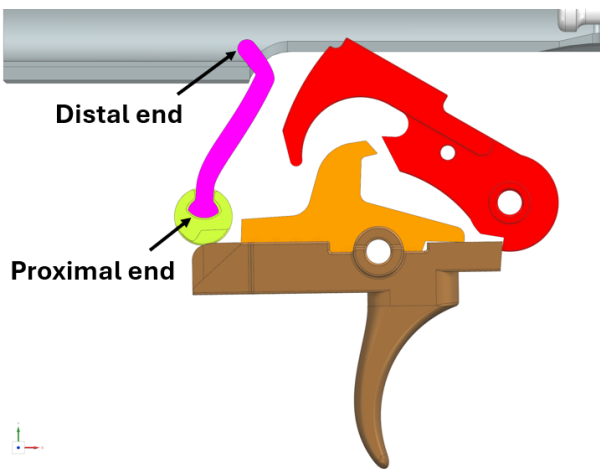
66. On information and belief, Defendant has and continues to willfully infringe, induce others to infringe, and/or contribute to the infringement of one or more claims of the '538 patent, including but not limited to claim 1, literally and/or under the doctrine of equivalents.

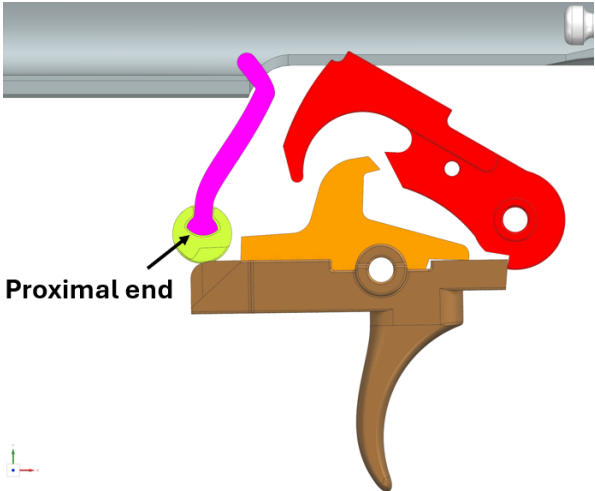
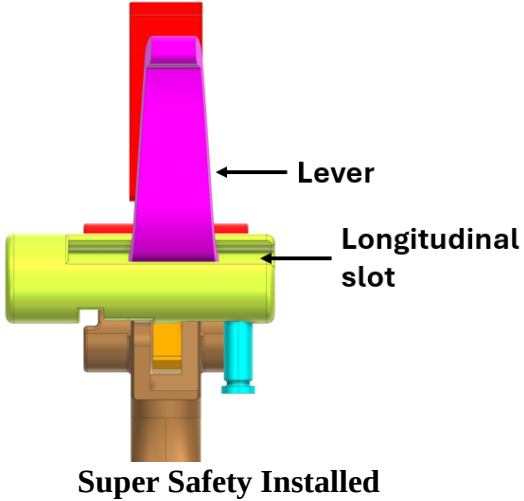
67. An exemplary comparison of the Super Safety, when assembled and used as intended, with claim 1 of the '538 Patent is illustrated in the chart below:

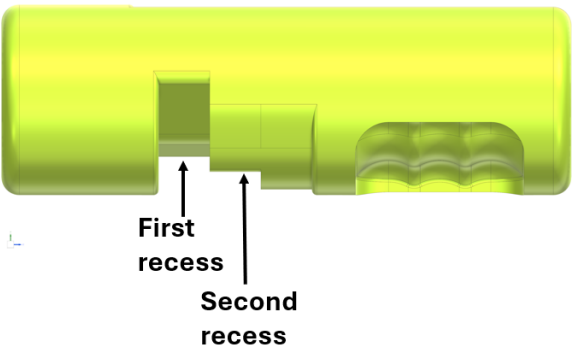
'538 Patent Claim 1	The Super Safety
1. A safety mechanism for a firearm comprising:	The Super Safety is part of a forced reset trigger mechanism installed into a firearm receiver in place of a standard safety.  Super Safety www.80-lower.com/products/hoffman-super-safety-for-ar-15-w-pre-cut-trigger-curved/  Super Safety Installed (Plaintiff-generated renderings of Super Safety here and below; cam selector and bolt carrier shown in section view for clarity)

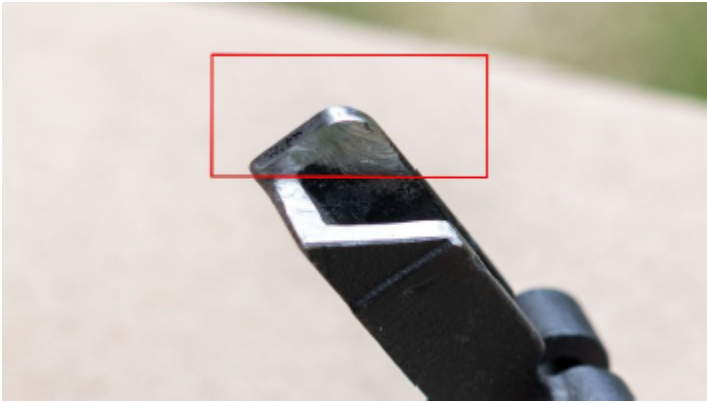
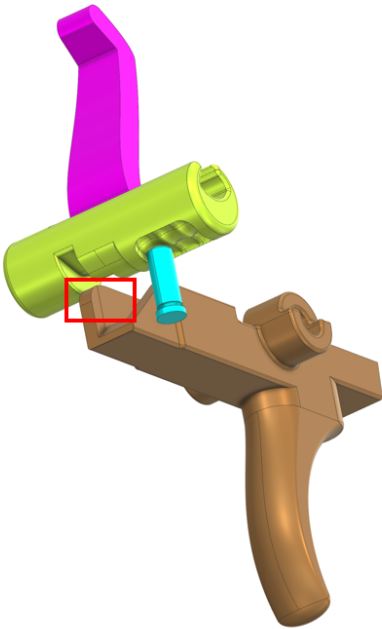
'538 Patent Claim 1	The Super Safety
a cam selector;	The Super Safety includes a dual mode cam selector that allows for selection of safe, active reset, and passive reset modes.  Dual Mode Cam Selector  Cam selector
a lever;	The Super Safety has a lever (pink) extending upward from the cam selector.  Lever

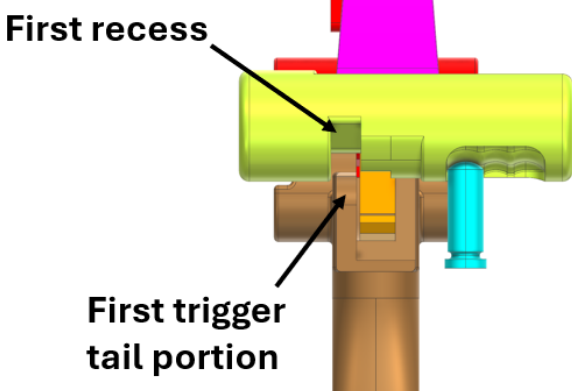
'538 Patent Claim 1	The Super Safety
a trigger;	The cam selector operates on a trigger. (brown) 
the cam selector comprising a first end, a second end, a top side, and a bottom side;	The Super Safety dual mode cam selector has two ends, a top side, and a bottom side as illustrated below. 
the cam selector comprising a longitudinal slot positioned on the top side of the cam selector;	The Super Safety dual mode cam selector comprises a longitudinal slot that is positioned on the top side and extends along the cam selector. 

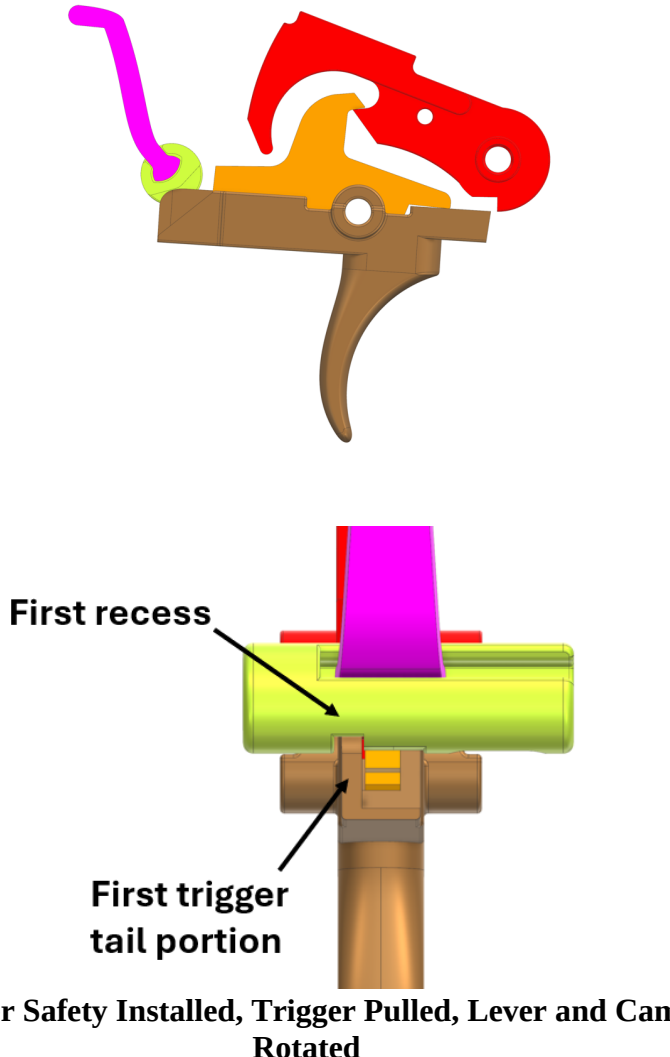
'538 Patent Claim 1	The Super Safety
the lever comprising a proximal end and a distal end;	The Super Safety lever (pink) has a proximal end and a distal end, as illustrated below.  The diagram illustrates the Super Safety lever assembly. A pink lever is shown with its proximal end (indicated by a green circle and labeled 'Proximal end') and its distal end (indicated by an arrow and labeled 'Distal end'). The lever is connected to a red component, which is part of a larger assembly including a yellow component and a brown component. The lever is shown in a curved position, indicating its range of motion.

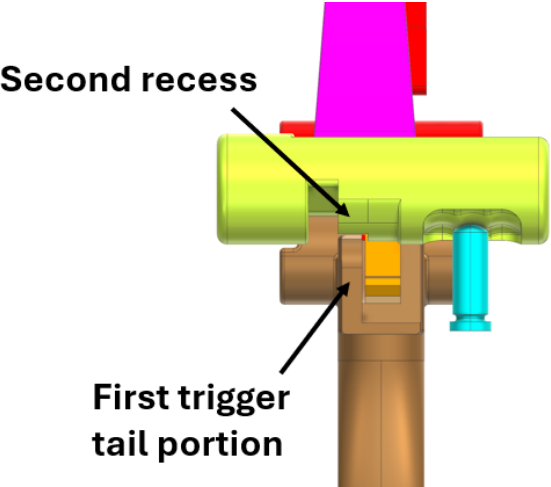
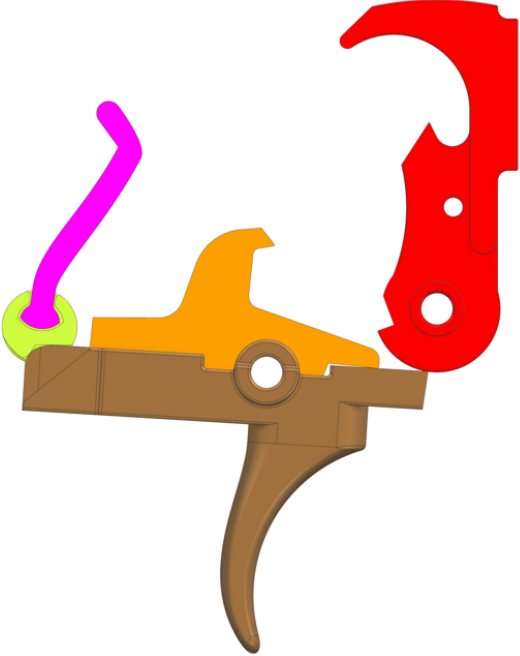
'538 Patent Claim 1	The Super Safety
the longitudinal slot being configured to receive the proximal end of the lever;	The longitudinal slot on the top side of the cam selector (yellow) is configured to receive the proximal end of the lever (pink).    Proximal end Lever Longitudinal slot Super Safety Installed

'538 Patent Claim 1	The Super Safety
the cam selector further comprising a first recess and a second recess on the bottom side of the cam selector;	The Super Safety dual mode cam selector has a first recess and a second recess on the bottom side of the cam. 

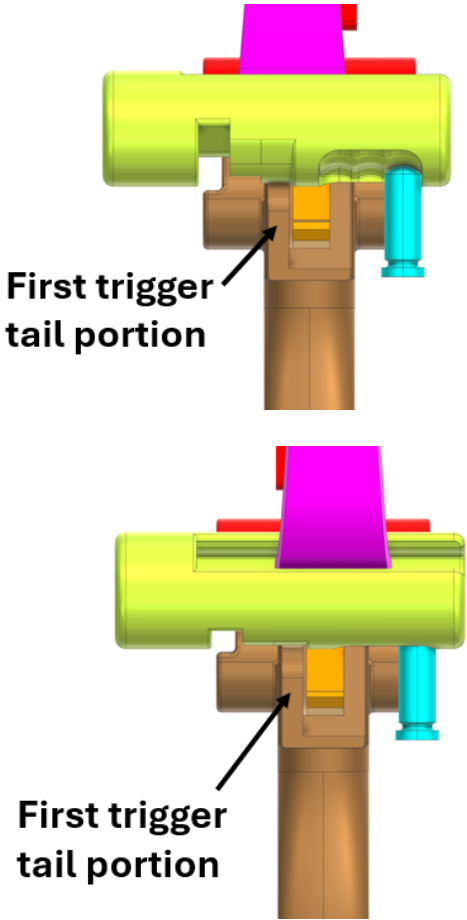
'538 Patent Claim 1	The Super Safety
the trigger comprising a first trigger tail portion;	The Super Safety dual mode trigger has a first trigger tail portion, shown in the red box below.  
the cam selector being configured to operate between a first mode, a second mode, and a third mode;	The Super Safety dual mode cam is operable in three modes: (1) passive reset (standard semi-automatic) (2) active reset, and (3) safe. Super Safety Guide at 1.
wherein the first mode of the cam selector is configured to allow the first trigger tail portion to be movable within the first recess,	The Super Safety dual mode cam selector is operable in standard semi-automatic mode, in which the first trigger tail aligns with the first recess of the cam.

'538 Patent Claim 1	The Super Safety
	 First recess First trigger tail portion Standard Semi-Automatic When the cam selector is in the first mode, the first trigger tail portion is movable within the first recess of the cam.  Super Safety Installed

'538 Patent Claim 1	The Super Safety
	 First recess First trigger tail portion Super Safety Installed, Trigger Pulled, Lever and Cam Rotated

'538 Patent Claim 1	The Super Safety
wherein the second mode of the cam selector is configured to allow the first trigger tail portion to engage the second recess and be moved down by a cam portion of the second recess when the cam selector rotates,	The Super Safety dual mode cam selector is operable in active reset mode, in which the first trigger tail aligns with the second recess of the cam.  Active Reset Mode In the second mode, when the cam is rotated by the lever, the cam selector portion of the second recess moves the first trigger tail portion down.  Super Safety Installed, Trigger Pulled

'538 Patent Claim 1	The Super Safety
	 Super Safety Installed, Lever and Cam Rotated Second recess First trigger tail portion

'538 Patent Claim 1	The Super Safety
and wherein the third mode of the cam selector is configured to prevent the trigger from being pulled.	The Super Safety dual mode cam is operable in safe mode, in which the first trigger tail portion does not align with a recess in the cam. The trigger is not movable within a recess of the cam, and the cam therefore prevents the trigger from being pulled.  The diagrams illustrate the 'First trigger tail portion' in two different states. In the top diagram, the trigger tail portion (red) is positioned such that it does not align with a recess in the cam (yellow). In the bottom diagram, the trigger tail portion (blue) is positioned similarly, also not aligning with the recess. The label 'First trigger tail portion' is used in both diagrams with an arrow pointing to the respective part.

68. On information and belief, in addition to direct infringement, Defendant takes active steps to induce others, including its customers, to directly infringe the '538 patent. Defendant takes such active steps knowing that those steps will induce, encourage, and facilitate direct infringement by others. Such active steps include, but are not limited to, installation of, encouraging, advertising, promoting, and instructing others to use and/or how to use the Super Safety while selling products. Examples of this is the promotional material found on Defendant's website informs customers to install the Infringing Devices into an AR15:

Super Safety Installation

1. Remove hammer and trigger pins.
2. Remove hammer, trigger, and disconnecter.
3. Uninstall original safety: Un-bolt the pistol grip. Remove safety detent and spring.
4. Install the Hoffman safety lever and its new detent. Reuse the safety detent spring.
5. Install the new trigger using your original disconnecter, trigger pin, and trigger spring.
6. Reinstall your hammer with its original hammer pin and hammer spring.
7. You're done! Hit the range! (R.I.P. your wallet)

69. On information and belief, Defendant knows or should know that such activities induce others to directly infringe at least claim 1 of the '538 Patent.

70. On information and belief, Defendant also contributes to the infringement of the '538 Patent by others, including its customers. Acts by Defendant that contribute to the infringement of others include, but are not limited to, the sale, offer for sale, and/or importation by Defendant of the components of the Super Safety, such as the cam or cam lever arm. The components are not suitable for substantial noninfringing use as they are specially designed and adapted to be used in a fire control unit to forcibly reset a trigger mechanism and infringe the '538 Patent.

71. Defendant has engaged in egregious infringement behavior with knowledge of the '538 Patent, which has been duly issued by the USPTO, and is presumed valid. On information and belief, Defendant has known or should have known that its actions constituted and continue to constitute infringement of the '538 Patent and that the '538 Patent is valid at least through the service of this complaint. Defendant could not reasonably or subjectively believe that its actions do not constitute infringement of the '538 Patent, nor could it reasonably or subjectively believe that the patent is invalid. Despite that knowledge and subjective belief, and the objectively high likelihood that its actions constitute infringement, Defendant has continued its infringing activities. As such, Defendant willfully infringes the '538 Patent.

72. By its actions, Defendant has injured Plaintiffs and are liable to Plaintiffs for infringement of the '538 Patent pursuant to 35 U.S.C. § 271.

73. By its actions, Defendant's infringement of the '538 Patent has irreparably injured Plaintiffs. Unless such infringing acts are enjoined by this Court, Plaintiffs will continue to suffer additional irreparable injury.

74. By its actions, Defendant's infringement of the '538 Patent has damaged and continues to damage, Plaintiffs in an amount yet to be determined.

75. Defendant's infringement of the '538 patent is exceptional and entitles Plaintiffs to attorneys' fees and costs incurred in prosecuting this action under 35 U.S.C. § 285.

76. Defendant's acts of infringement are willful and for no other purpose than to deliberately and irreparably harm Plaintiffs' business, sales, reputation, and good-will.

77. Plaintiffs have been substantially harmed by Defendant's infringing activities and are entitled to relief including but not limited to a preliminary injunction, a permanent injunction, damages adequate to compensate for the infringement, being lost profits or no less than a reasonable royalty, treble damages, and attorneys' fees.

COUNT IV — INFRINGEMENT OF THE '159 PATENT

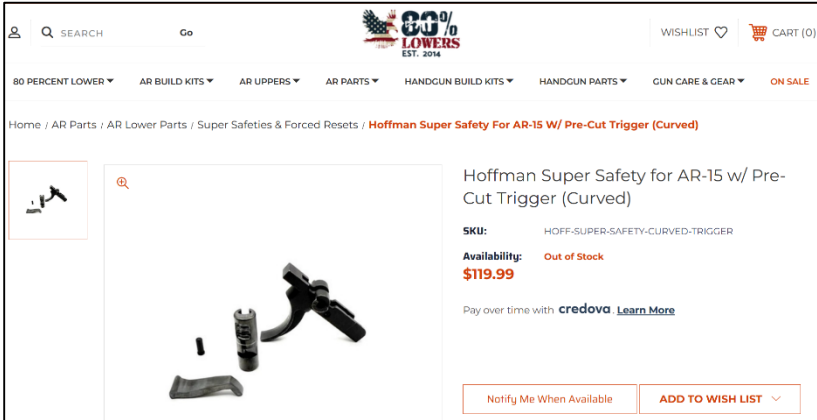
78. Plaintiffs re-allege and incorporate the allegations of the preceding paragraphs as if fully set forth herein.

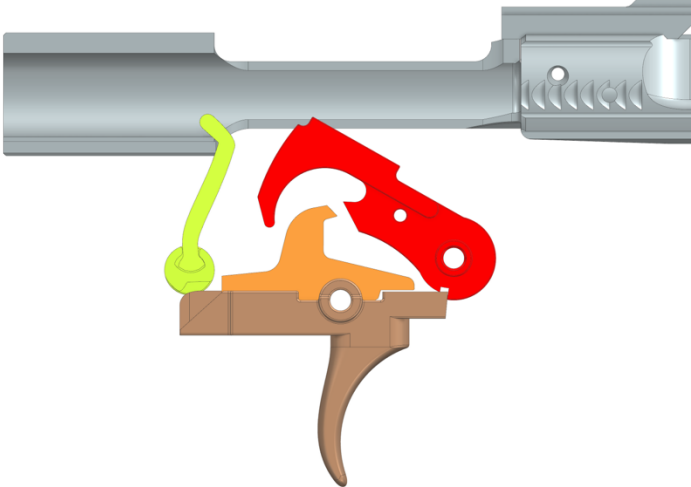
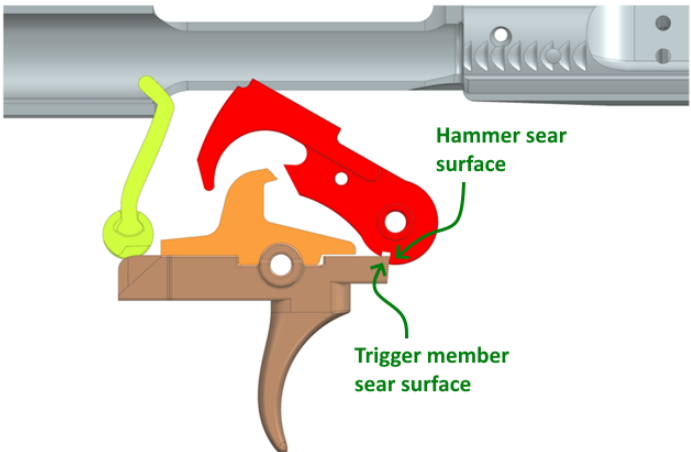
79. In violation of 35 U.S.C. § 271, Defendant has infringed, induced others to infringe, and/or contributed to the infringement of one or more claims of the '159 patent, including but not limited to claim 1, literally and/or under the doctrine of equivalents, by among other things, making, using, offering for sale, selling, and/or importing into the United States unlicensed

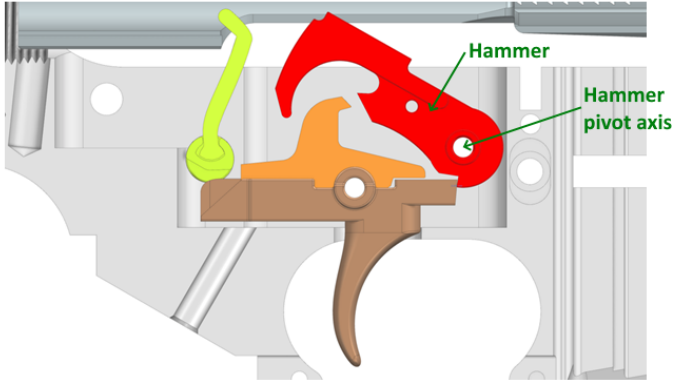
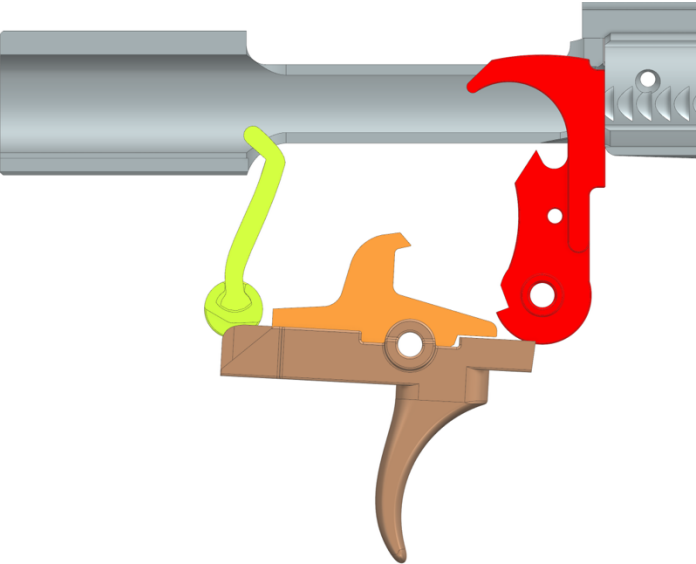
products in a manner that infringes the '159 patent. Such unlicensed products include the Super Safety and Atrius Selector.

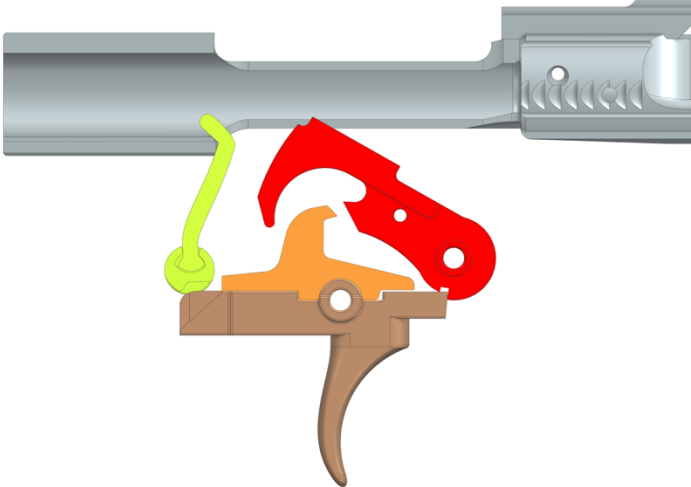
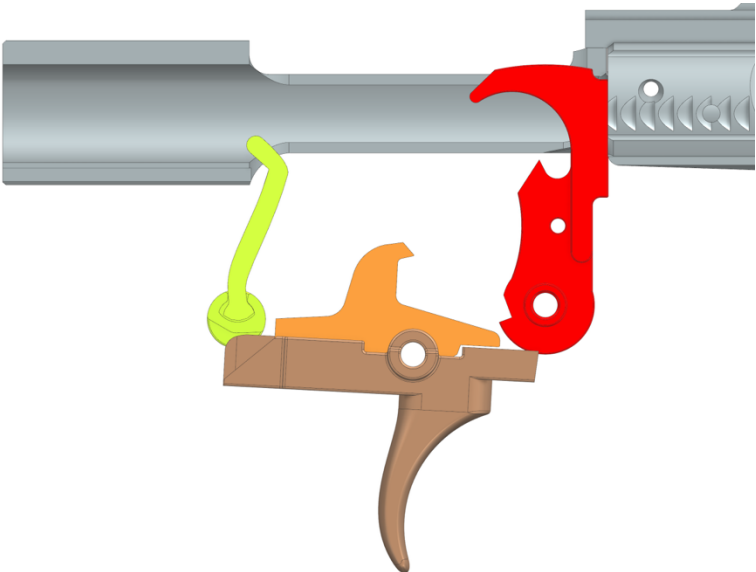
80. On information and belief, Defendant has and continues to willfully infringe, induce others to infringe, and/or contribute to the infringement of one or more claims of the '159 patent, including but not limited to claim 1, literally and/or under the doctrine of equivalents.

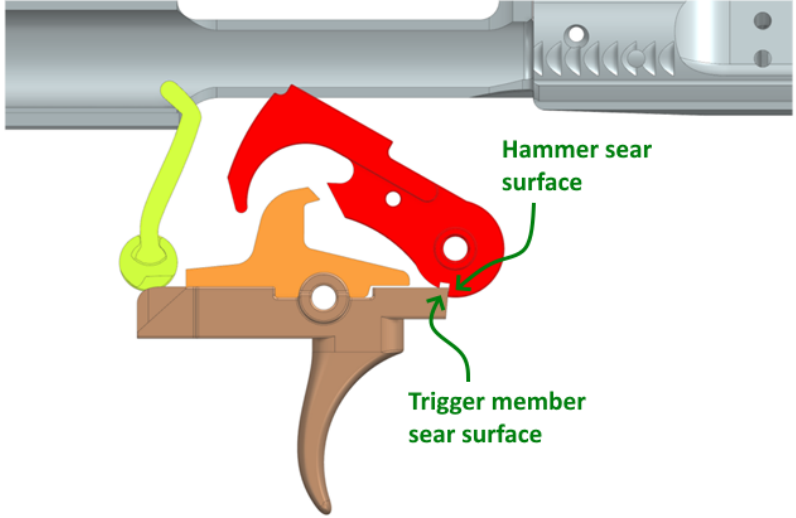
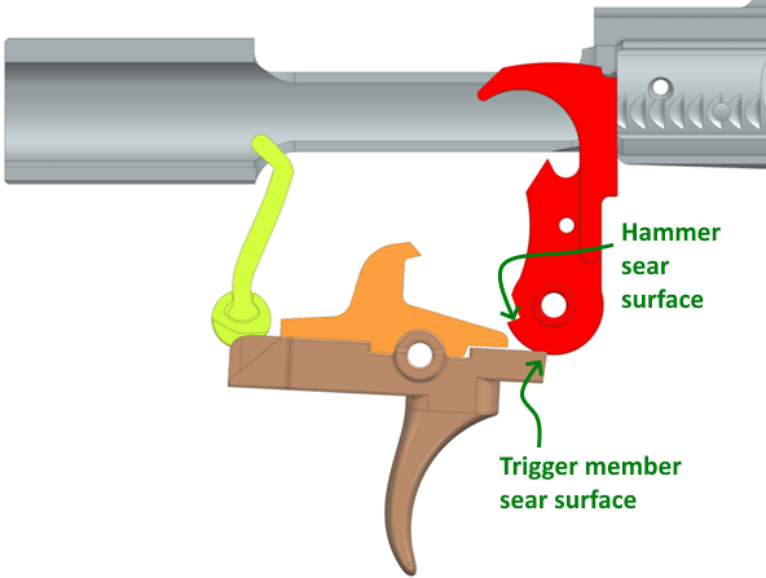
81. An exemplary comparison of the Super Safety, when assembled and used as intended, with claim 1 of the '159 Patent is illustrated in the chart below:

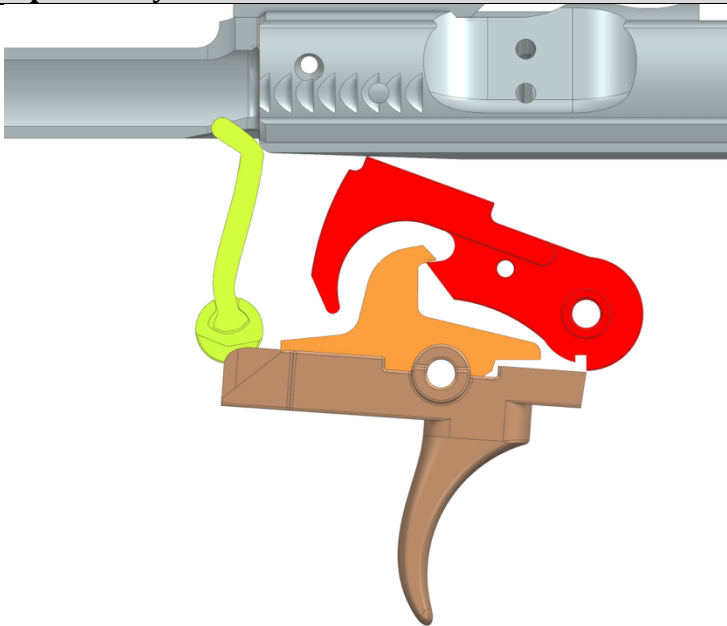
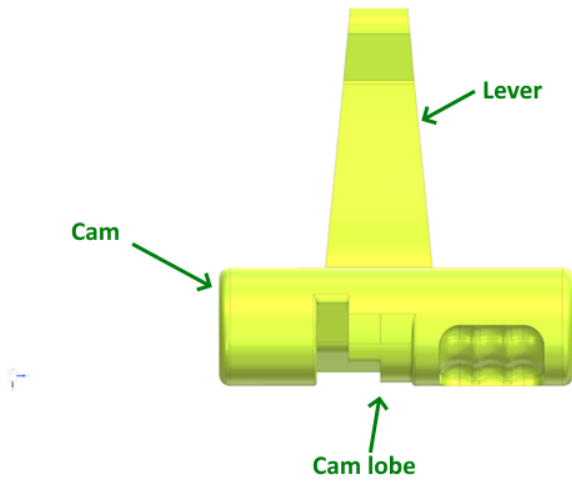
'159 Patent Claim 1	The Super Safety
1. A firearm trigger mechanism for a firearm having a fire control mechanism pocket and a reciprocating bolt means, the trigger mechanism operable in a first, standard semi-automatic mode and in a second, forced reset semi-automatic mode, the mechanism comprising:	When installed and used as directed, the Super Safety is part of a forced reset trigger mechanism that uses a bolt means. With the Super Safety installed, the trigger mechanism operates in a standard semi-automatic mode and a forced reset semi-automatic mode  Super Safety www.80-lower.com/products/hoffman-super-safety-for-ar-15-w-pre-cut-trigger-curved/

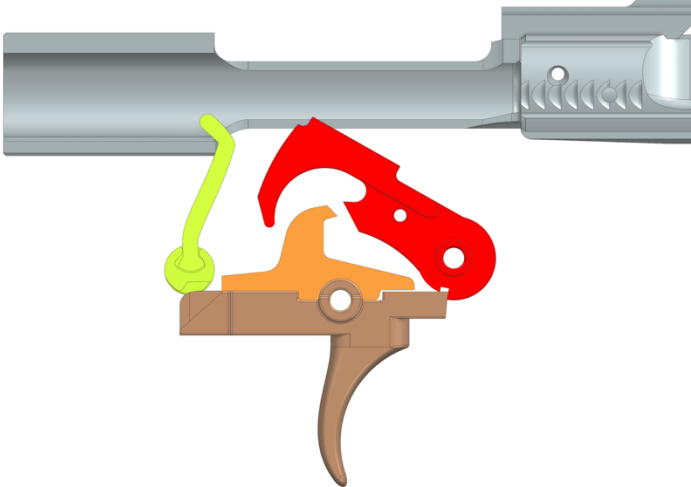
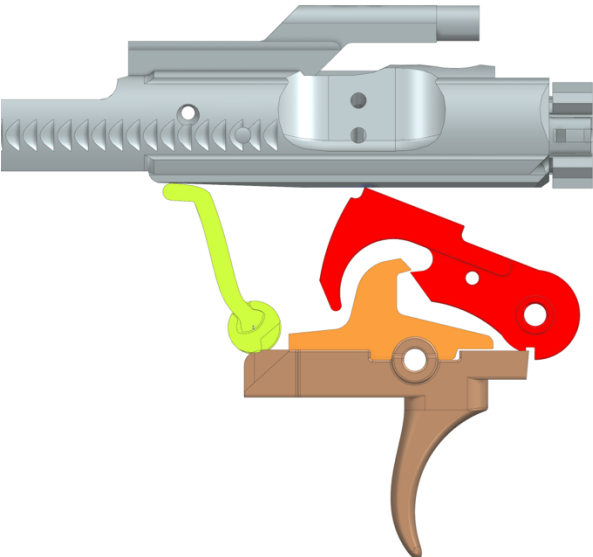
'159 Patent Claim 1	The Super Safety
	 Super Safety (Installed) (Plaintiff-generated renderings of the Super Safety here and below)
a hammer having a sear surface and a hook for engaging a disconnector and adapted to be mounted in a fire control mechanism pocket of a receiver	The Super Safety (yellow) is installed in a fire control mechanism pocket of a receiver along with a hammer (red) that has a sear surface and a hook for engaging a disconnector (orange).  Super Safety (Installed)
to pivot on a transverse hammer pivot axis between set and released positions, the hammer adapted to be pivoted rearward by rearward movement of a bolt means,	The hammer (red) pivots on a transverse hammer pivot axis between set and released positions, depicted below. The hammer is adapted to be pivoted rearward by rearward movement of a bolt means.

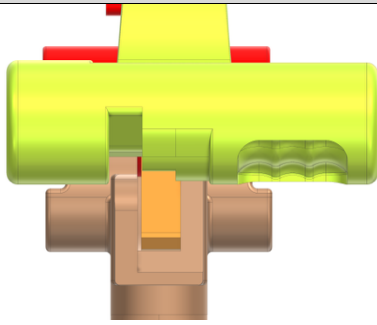
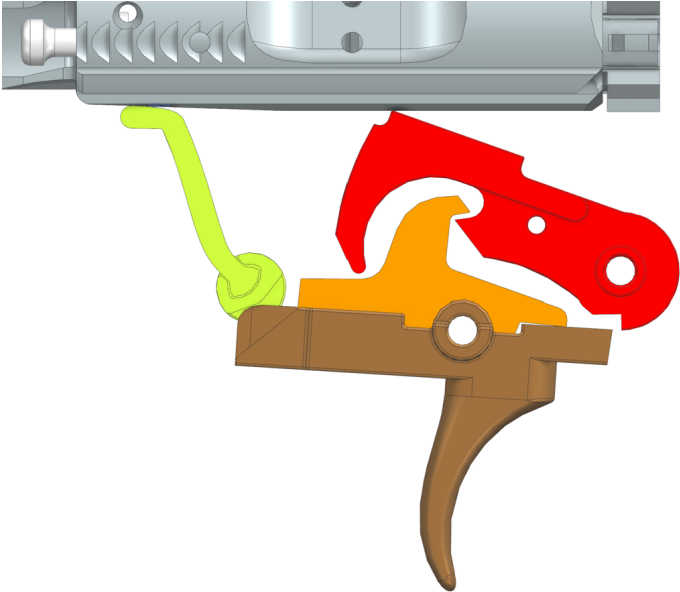
'159 Patent Claim 1	The Super Safety
	 Hammer Set Position  Hammer Released Position
a trigger member having a trigger sear surface and adapted to be mounted in the fire control mechanism pocket to pivot on a transverse trigger member pivot axis	The Super Safety (yellow) is installed with a trigger member (brown) in the fire control mechanism pocket and the trigger member pivots on a transverse trigger member pivot axis between set and released positions. The trigger member has a sear surface.

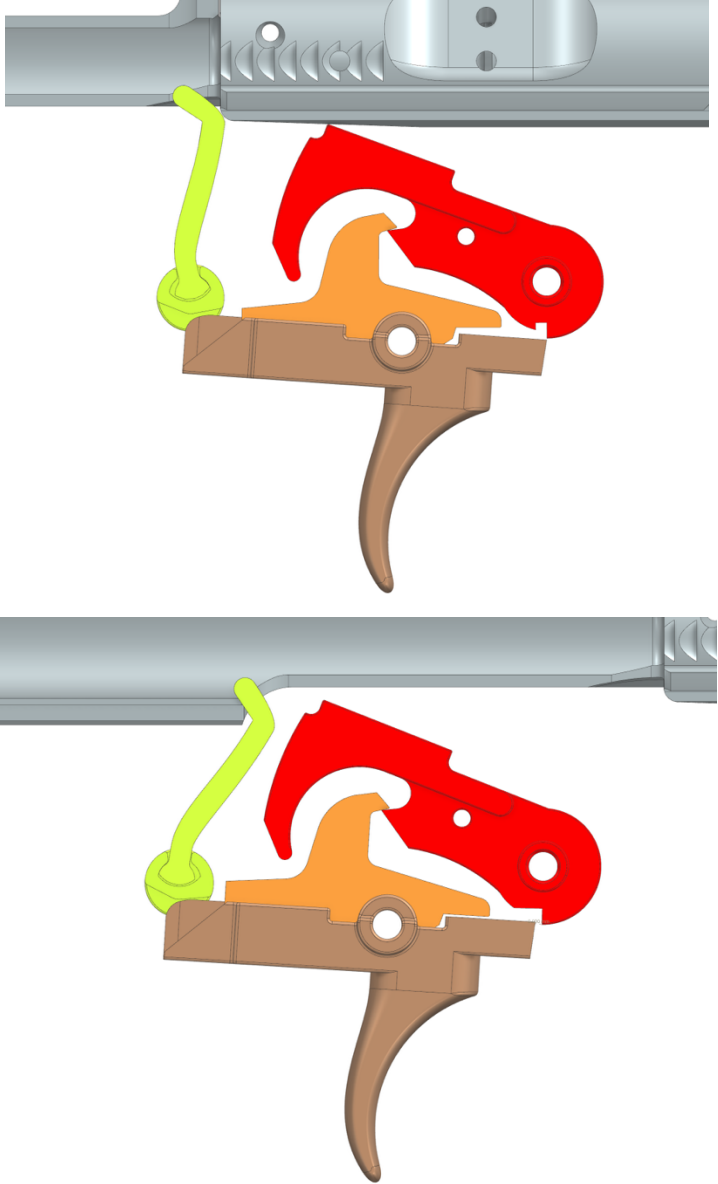
'159 Patent Claim 1	The Super Safety
between set and released positions,	 Trigger Member Set Position  Trigger Member Released Position
wherein the trigger member sear surface and hammer sear surface are in engagement in the set positions of the hammer and trigger member	The sear surface of the trigger member (brown) and sear surface of the hammer (red) are in engagement when the hammer and trigger member are in their set positions.

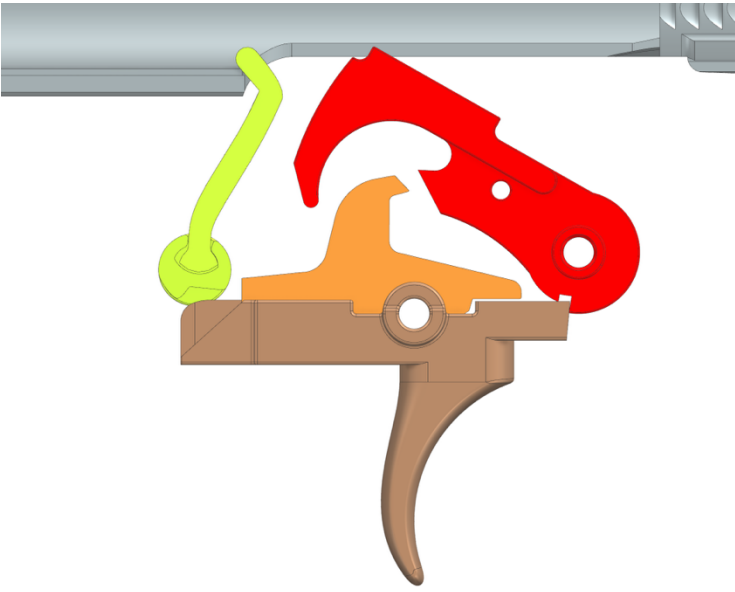
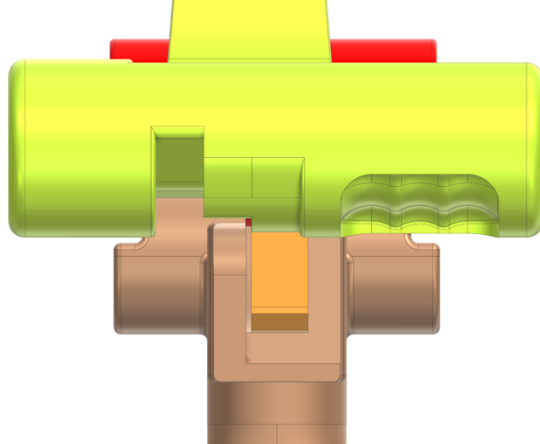
'159 Patent Claim 1	The Super Safety
	 Trigger Member and Hammer Member Set Position
and are out of engagement in the released positions of the hammer and trigger member,	The sear surface of the trigger member (brown) and sear catch surface of the hammer (red) are out of engagement in the released position.  Trigger Member and Hammer Member Released Positions
the disconnecter having a hook for engaging the hammer and adapted to be mounted in the fire control mechanism pocket to pivot on a	The disconnecter (orange) is adapted to be mounted in the fire control mechanism pocket to pivot on a transverse disconnecter pivot axis. The disconnecter has a hook for engaging the hammer (red).

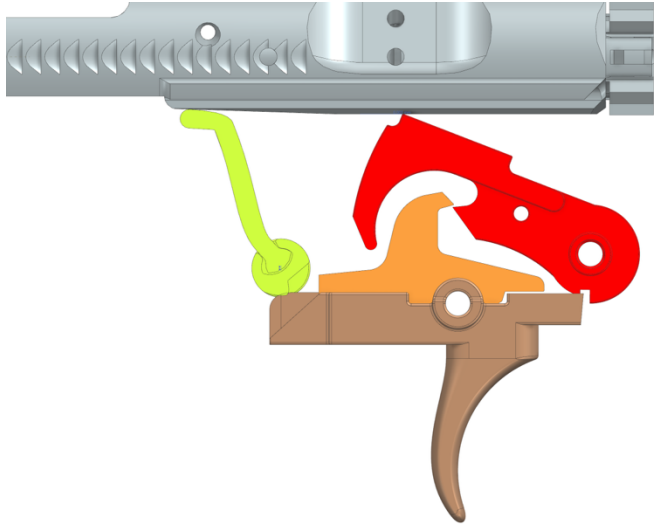
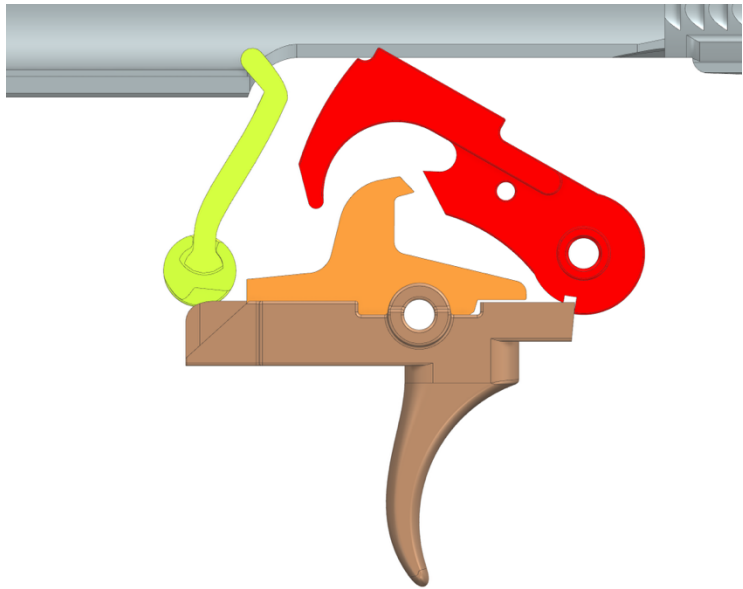
'159 Patent Claim 1	The Super Safety
transverse disconnecter pivot axis, and	 The diagram shows a cross-section of a firearm's fire control mechanism. A yellow hook-shaped component, labeled 'Disconnecter Hook Engaged', is shown in a position where it is engaged with a red component. The hook is connected to a brown lever. The red component is part of the fire control mechanism. The yellow hook is shown in a position where it is engaged with the red component, preventing the lever from moving forward and firing the weapon. Disconnecter Hook Engaged
a cam having a cam lobe and adapted to be movably mounted in the fire control mechanism pocket,	The Super Safety has a cam with a cam lobe and lever that is adapted to be movably mounted in the fire control mechanism pocket. (See image above depicting Super Safety, shown in yellow, in fire control mechanism pocket)  The diagram shows a yellow cam component with a lever. The cam is labeled 'Cam' and the lever is labeled 'Lever'. The cam has a lobe labeled 'Cam lobe'. The cam is shown in a position where it is engaged with the lever, preventing the lever from moving forward and firing the weapon. Super Safety Cam with Lobe and Lever
the cam being movable between a first position and a second position, in the second position the cam lobe forces the	The cam is movable between a first position and a second position.

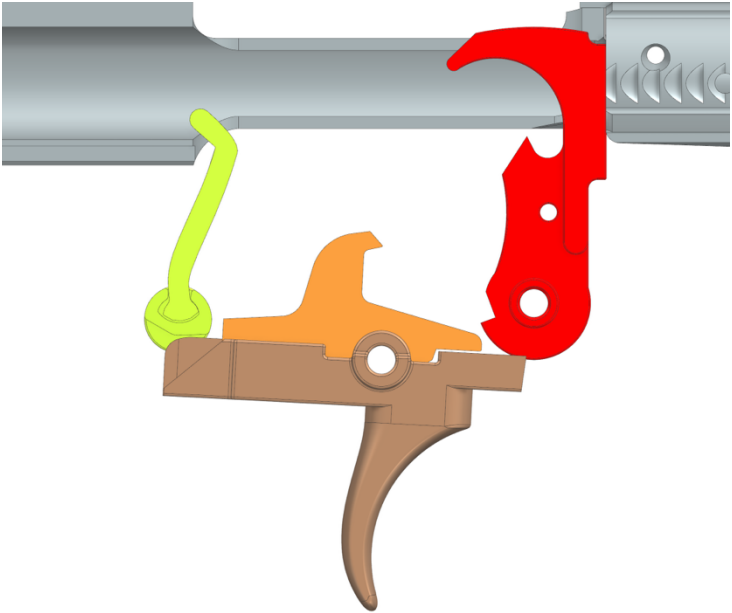
'159 Patent Claim 1	The Super Safety
trigger member toward the set position,	 Cam and Lobe First Position In the second position, the cam lobe forces the trigger member (brown) toward the set position when the cam is in the forced reset semi-automatic mode.  Cam and Lobe Second Position
whereupon in the first mode,	While in the first (standard semi-automatic) mode,

'159 Patent Claim 1	The Super Safety
	
rearward movement of the bolt means causes rearward pivoting of the hammer such that the disconnecter hook catches the hammer hook,	Rearward movement of the bolt means causes rearward pivoting of the hammer (red) such that the disconnecter (orange) hook catches the hammer hook.  Disconnecter Hook Catches the Hammer
and thereafter the bolt means moves forward into battery,	Thereafter, the bolt means moves forward into battery,

'159 Patent Claim 1	The Super Safety
	 Pressure on Trigger Member Prevents Reset
at which time a user must manually reduce pressure on the trigger member to free the hammer from the disconnector to permit the hammer and trigger member to pivot to the set positions so that the user can pull the trigger	at which time a user must manually reduce pressure on the trigger member (brown) to free the hammer (red) from the disconnector (orange) to permit the hammer and trigger member to pivot to the set positions so that the user can pull the trigger member to fire the firearm.

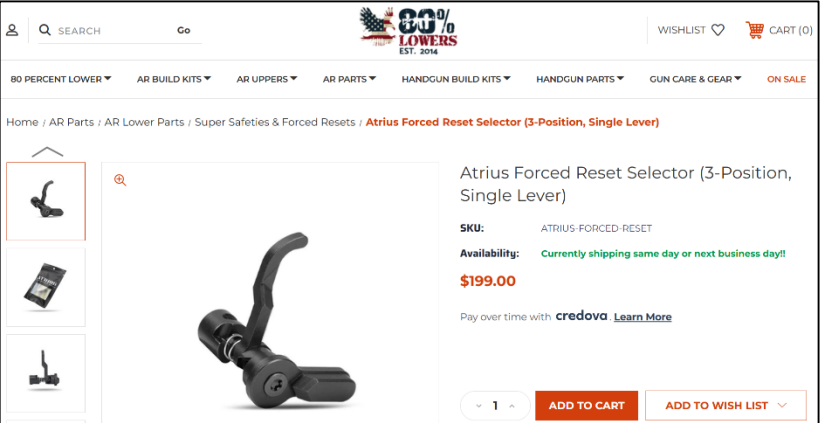
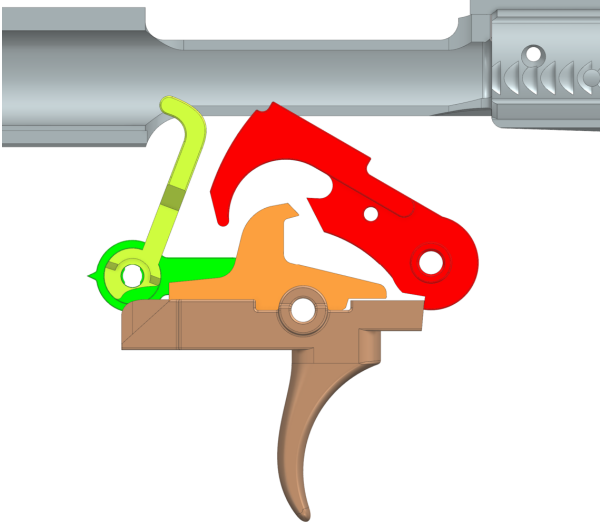
'159 Patent Claim 1	The Super Safety
member to fire the firearm, and	 Reduced Pressure on Trigger Member Allows Reset
whereupon in a second mode, rearward movement of the bolt means causes rearward pivoting of the hammer such that the disconnecter hook is prevented from holding the hammer,	When in the second (forced reset semi-automatic) mode,  Rearward movement of the bolt means causes rearward pivoting of the hammer (red) and the cam to force the trigger member toward the reset position such that the disconnecter (orange) hook is prevented from holding the hammer hook.

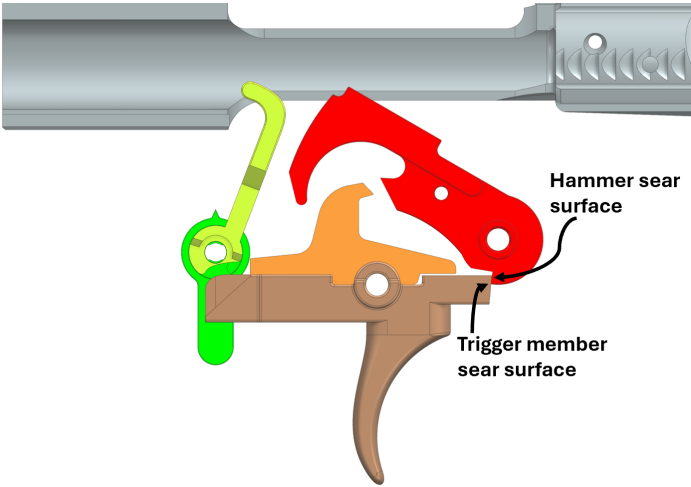
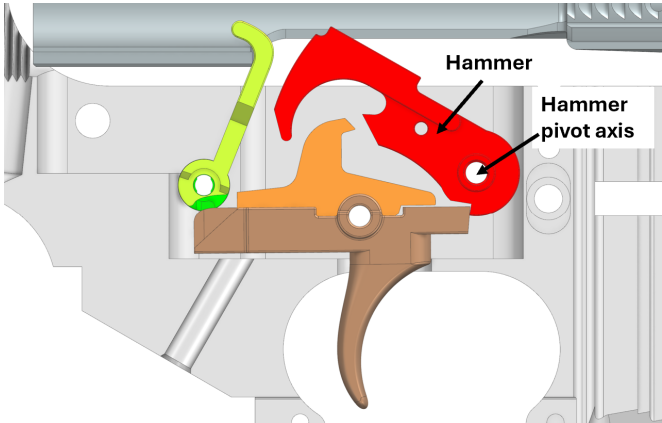
'159 Patent Claim 1	The Super Safety
	
and thereafter the bolt means moves forward into battery, at which time the user can pull the trigger member to fire the firearm.	Thereafter, the bolt means moves forward into battery and the hammer moves to its reset position,  ... at which time the user can pull the trigger member (brown) to fire the firearm without having to first release pressure on the trigger member.

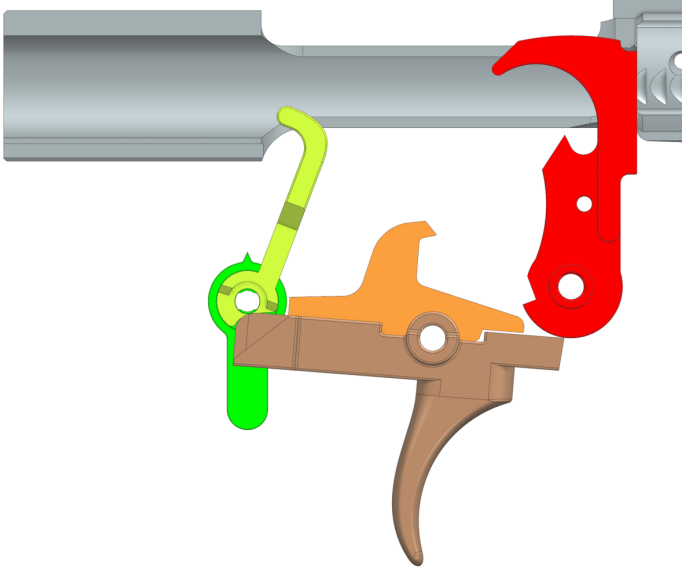
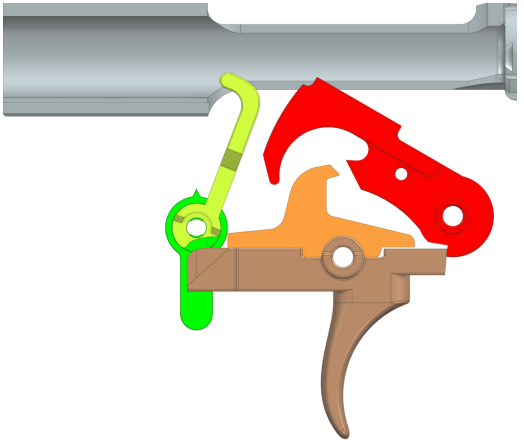
'159 Patent Claim 1	The Super Safety
	

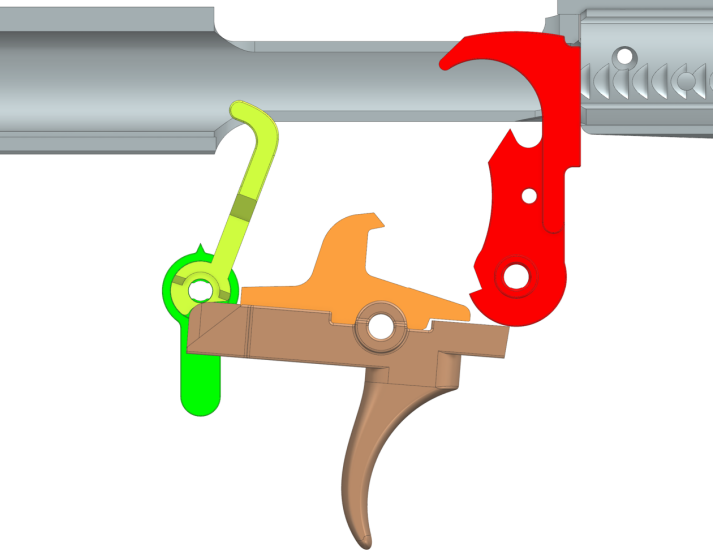
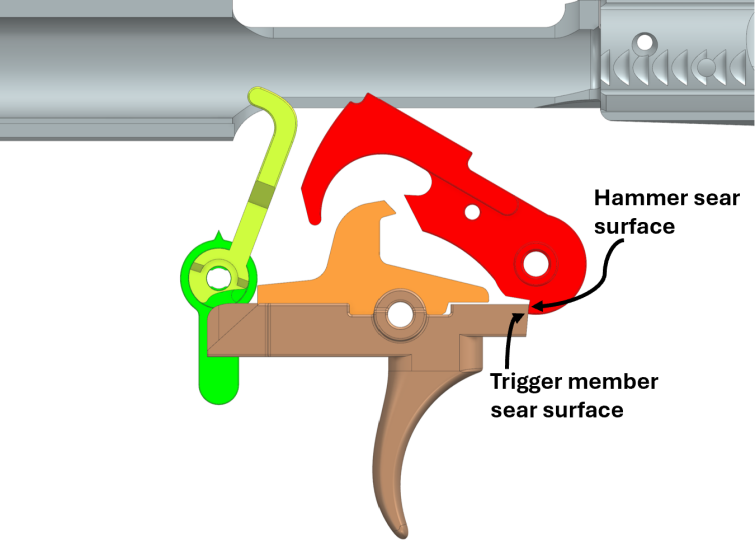
82. An exemplary comparison of the Atrius Selector, when assembled and used as intended, with claim 1 of the '159 Patent is illustrated in the chart below:

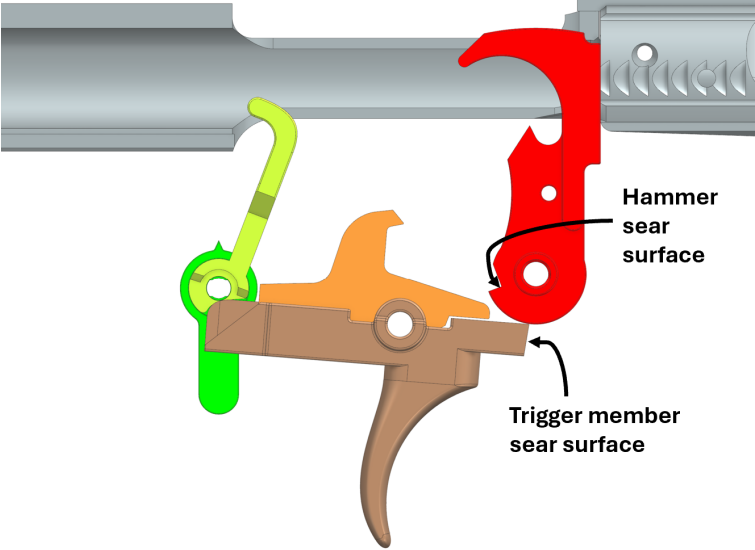
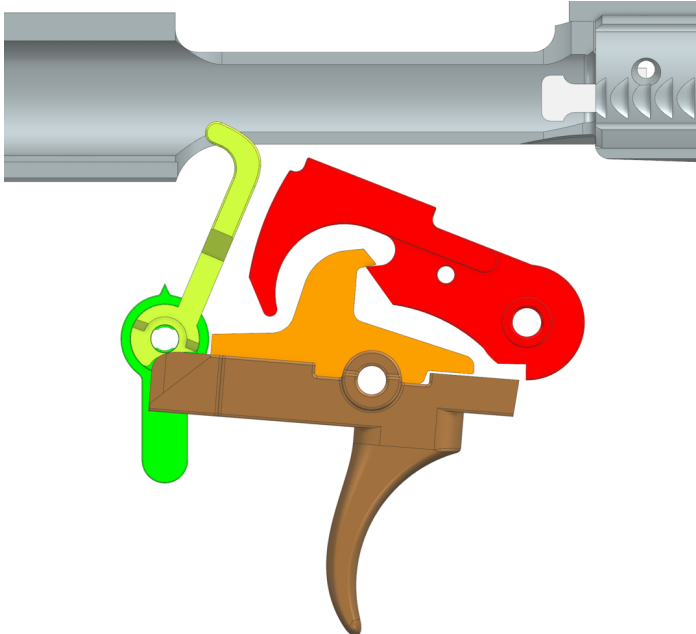
'159 Patent Claim 1	The Atrius Selector
1. A firearm trigger mechanism for a firearm having a fire control mechanism pocket and a reciprocating bolt means, the trigger mechanism operable in a first, standard semi-automatic mode and in a second, forced reset semi-automatic mode, the mechanism comprising:	When installed and used as directed, the Atrius Selector is part of a firearm trigger mechanism that uses a bolt means. With the Atrius Selector installed, the trigger mechanism operates in a standard semi-automatic mode and a forced reset semi-automatic mode  Atrius Selector

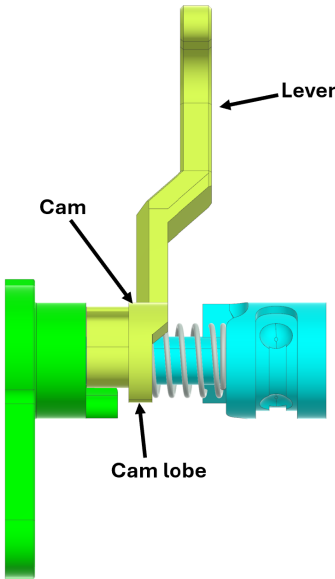
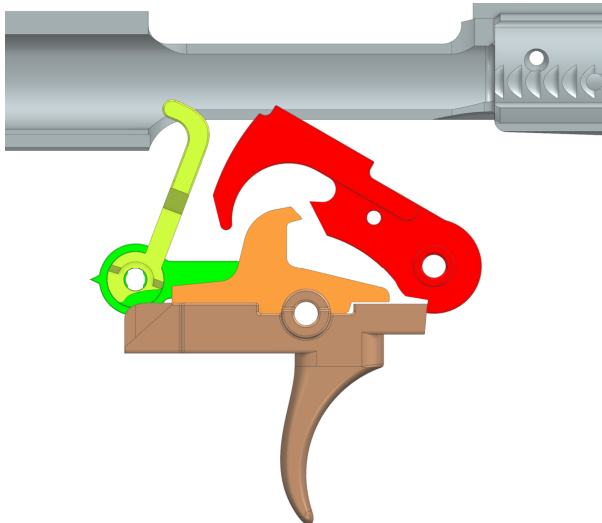
'159 Patent Claim 1	The Atrius Selector
	 www.80-lower.com/products/atrus-forced-reset-selector-3-position-single-lever/  Atrius Selector (Installed) (Plaintiff-generated renderings of the Atrius Selector here and below)
a hammer having a sear surface and a hook for engaging a disconnecter and adapted to be mounted in a fire control mechanism pocket of a receiver	The Atrius Selector (yellow) is installed in a fire control mechanism pocket of a receiver along with a hammer (red) that has a sear surface and a hook for engaging a disconnecter (orange).

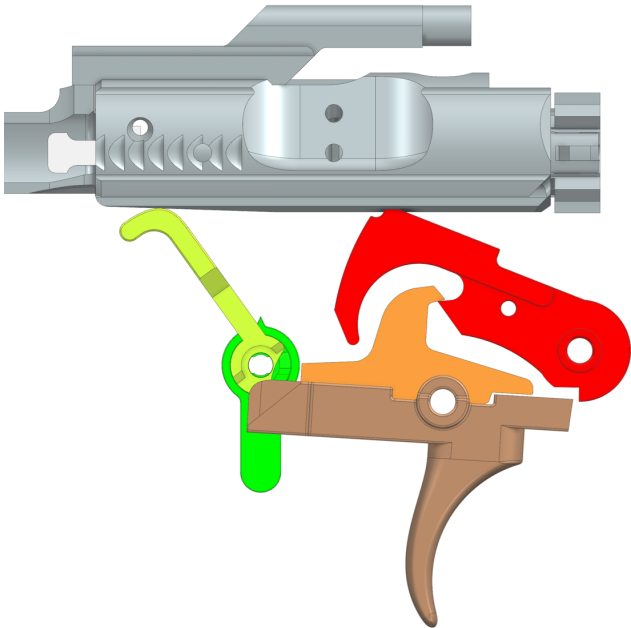
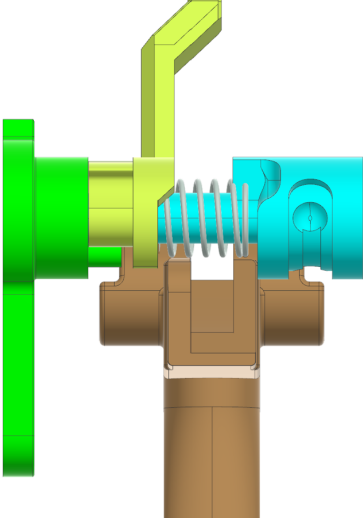
'159 Patent Claim 1	The Atrius Selector
	 Hammer sear surface Trigger member sear surface Atrius Selector (Installed)
to pivot on a transverse hammer pivot axis between set and released positions, the hammer adapted to be pivoted rearward by rearward movement of a bolt means,	The hammer (red) pivots on a transverse hammer pivot axis between set and released positions, depicted below. The hammer is adapted to be pivoted rearward by rearward movement of a bolt means.  Hammer Hammer pivot axis Hammer Set Position

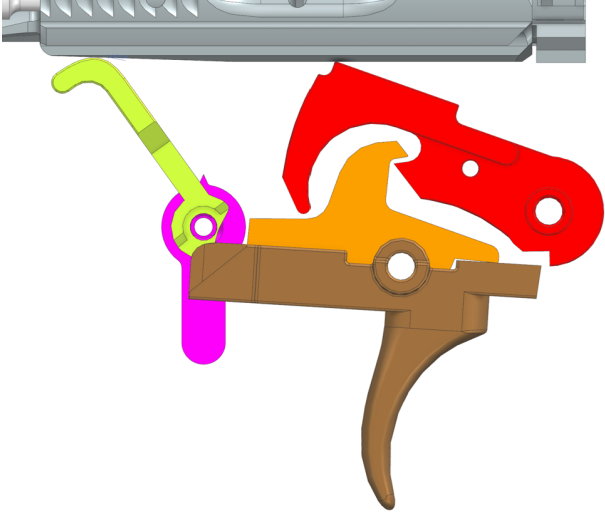
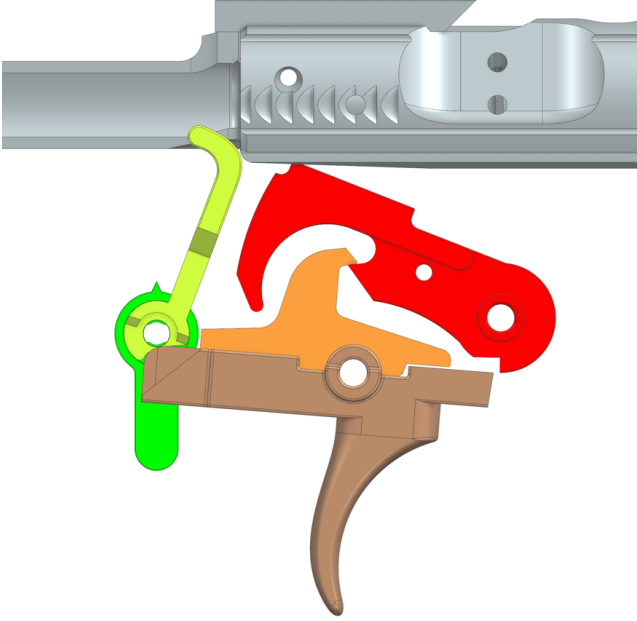
'159 Patent Claim 1	The Atrius Selector
	 Hammer Released Position
a trigger member having a trigger sear surface and adapted to be mounted in the fire control mechanism pocket to pivot on a transverse trigger member pivot axis between set and	The Atrius Selector (yellow) is installed with a trigger member (brown) in the fire control mechanism pocket and the trigger member pivots on a transverse trigger member pivot axis between set and released positions. The trigger member has a sear surface.  Trigger Member Set Position

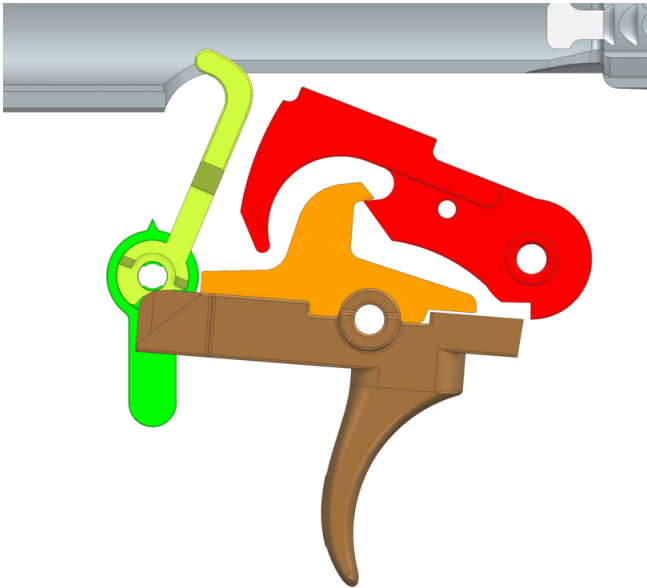
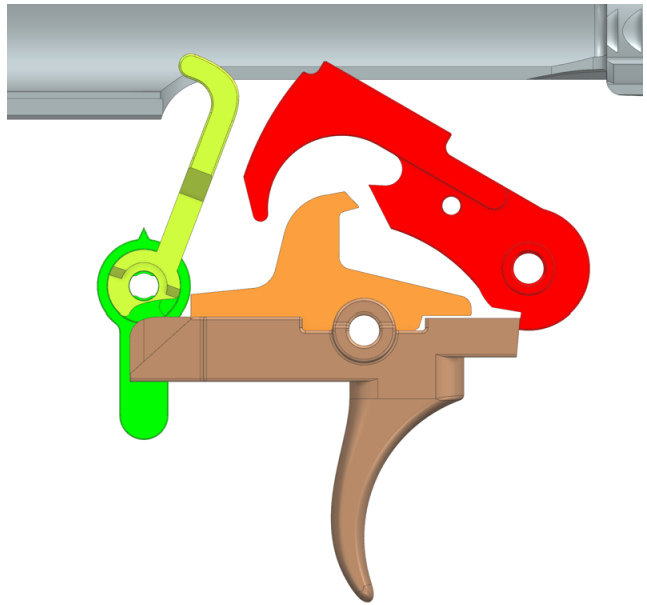
'159 Patent Claim 1	The Atrius Selector
released positions,	 Trigger Member Released Position
wherein the trigger member sear surface and hammer sear surface are in engagement in the set positions of the hammer and trigger member	The sear surface of the trigger member (brown) and sear surface of the hammer (red) are in engagement when the hammer and trigger member are in their set positions.  Trigger Member and Hammer Member Set Position
and are out of engagement in the released positions of the hammer and trigger member,	The sear surface of the trigger member (brown) and sear catch surface of the hammer (red) are out of engagement in the released position.

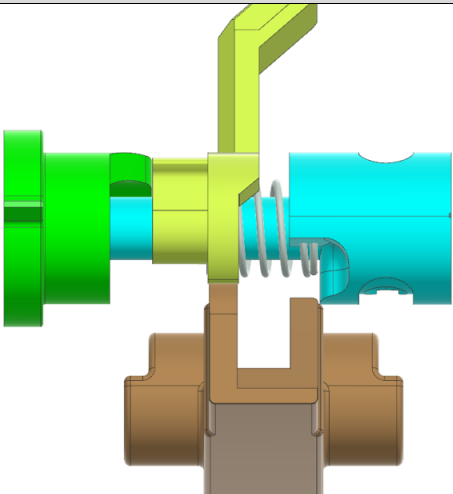
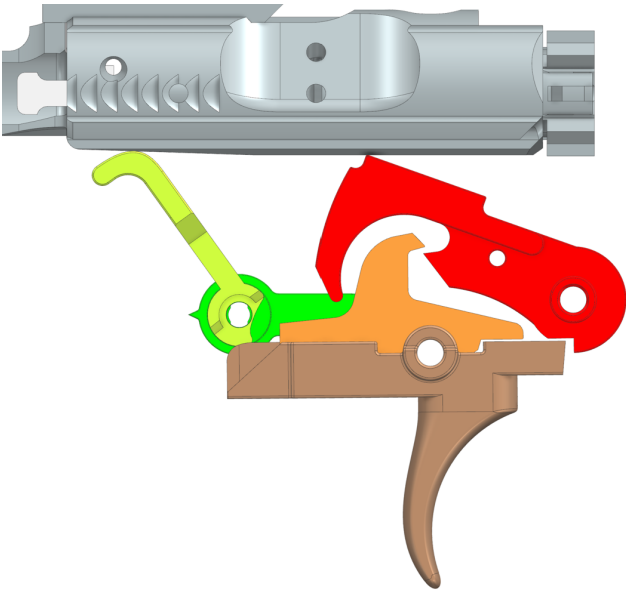
'159 Patent Claim 1	The Atrius Selector
	 Hammer sear surface Trigger member sear surface Trigger Member and Hammer Member Released Positions
the disconnecter having a hook for engaging the hammer and adapted to be mounted in the fire control mechanism pocket to pivot on a transverse disconnecter pivot axis, and	The disconnecter (orange) is adapted to be mounted in the fire control mechanism pocket to pivot on a transverse disconnecter pivot axis. The disconnecter has a hook for engaging the hammer (red).  Disconnecter Hook Engaged
a cam having a cam lobe and adapted to be	The Atrius Selector has a cam with a cam lobe and lever that is adapted to be movably mounted in the fire control mechanism

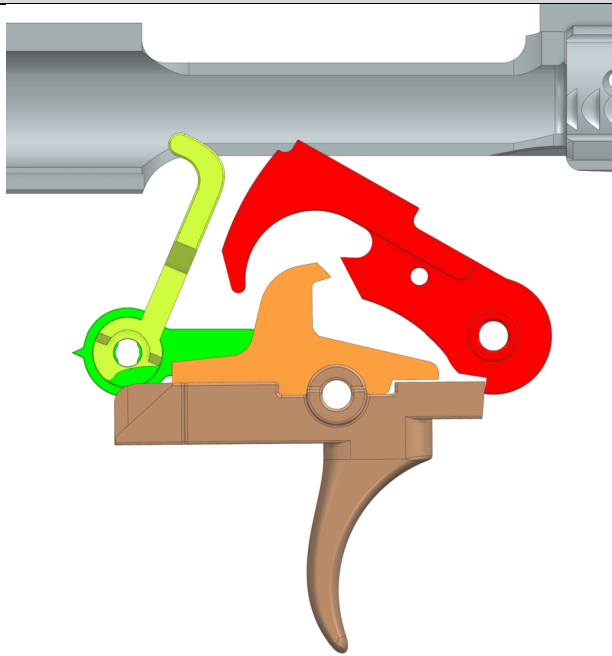
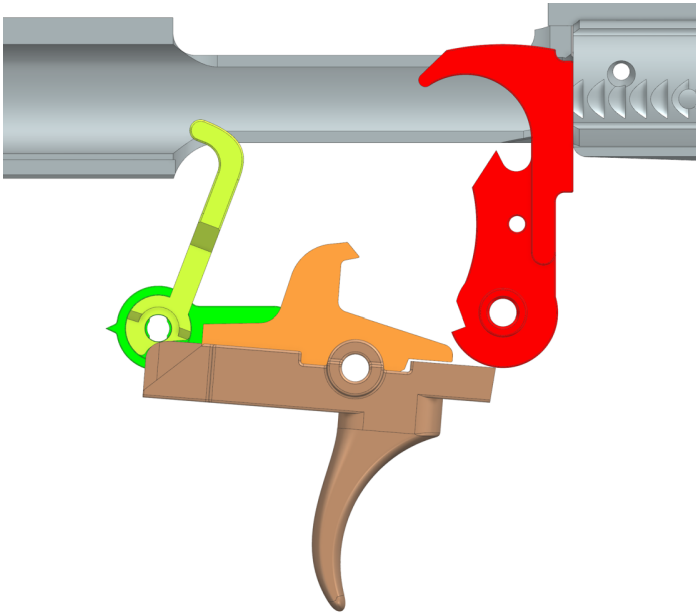
'159 Patent Claim 1	The Atrius Selector
movably mounted in the fire control mechanism pocket,	pocket. (See image above depicting Atrius Selector, shown in yellow, in fire control mechanism pocket)  Atrius Selector Cam with Lobe and Lever
the cam being movable between a first position and a second position, in the second position the cam lobe forces the trigger member toward the set position,	The cam is movable between a first position and a second position.  Cam and Lobe First Position In the second position, the cam lobe forces the trigger member (brown) toward the set position when the cam is in the forced reset semi-automatic mode.

'159 Patent Claim 1	The Atrius Selector
	 Cam and Lobe Second Position
whereupon in the first mode, rearward movement of the bolt means causes rearward pivoting of the hammer such that the disconnector hook catches the hammer hook,	While in the first (standard semi-automatic) mode,  Cam in the First (Semi-Automatic) Mode Rearward movement of the bolt means causes rearward pivoting of the hammer (red) such that the disconnector (orange) hook catches the hammer hook.

'159 Patent Claim 1	The Atrius Selector
	 Disconnecter Hook Catches the Hammer
and thereafter the bolt means moves forward into battery,	Thereafter, the bolt means moves forward into battery, 

'159 Patent Claim 1	The Atrius Selector
	 Pressure on Trigger Member Prevents Reset
at which time a user must manually reduce pressure on the trigger member to free the hammer from the disconnector to permit the hammer and trigger member to pivot to the set positions so that the user can pull the trigger member to fire the firearm, and	... at which time a user must manually reduce pressure on the trigger member (brown) to free the hammer (red) from the disconnector (orange) to permit the hammer and trigger member to pivot to the set positions so that the user can pull the trigger member to fire the firearm.  Reduced Pressure on Trigger Member Allows Reset
whereupon in a second mode,	When in the second (forced reset semi-automatic) mode,

'159 Patent Claim 1	The Atrius Selector
	 (am in the Second (Forced-Reset Semi-Automatic) Mode
rearward movement of the bolt means causes rearward pivoting of the hammer such that the disconnecter hook is prevented from holding the hammer,	Rearward movement of the bolt means causes rearward pivoting of the hammer (red) and the cam to force the trigger member toward the reset position such that the disconnecter (orange) hook is prevented from holding the hammer hook. 
and thereafter the bolt means moves forward into battery,	Thereafter, the bolt means moves forward into battery and the hammer moves to its reset position,

'159 Patent Claim 1	The Atrius Selector
	
at which time the user can pull the trigger member to fire the firearm.	... at which time the user can pull the trigger member (brown) to fire the firearm without having to first release pressure on the trigger member. 

83. On information and belief, in addition to direct infringement, Defendant takes active steps to induce others, including its customers, to directly infringe the '159 patent.

Defendant takes such active steps knowing that those steps will induce, encourage, and facilitate direct infringement by others. Such active steps include, but are not limited to, installation of, encouraging, advertising, promoting, and instructing others to use and/or how to use the Super Safety and Atrius Selector while selling products.

Super Safety:

Super Safety Installation

1. Remove hammer and trigger pins.
2. Remove hammer, trigger, and disconnecter.
3. Uninstall original safety: Un-bolt the pistol grip. Remove safety detent and spring.
4. Install the Hoffman safety lever and its new detent. Reuse the safety detent spring.
5. Install the new trigger using your original disconnecter, trigger pin, and trigger spring.
6. Reinstall your hammer with its original hammer pin and hammer spring.
7. You're done! Hit the range! (R.I.P. your wallet)

Atrius Selector:

Selector Installation & Function

The Atrius Selector installs like any other AR-15 safety lever, utilizing the original safety lever hole, detent, and spring. The selector's screw should be tightened with blue Loctite and torqued to 15 in.-lbs. (1.7 Nm) with a T10 Torx bit. When installed properly, the curved tip of the Selector's cam lever should face rearward, toward the buffer.

84. On information and belief, Defendant knows or should know that such activities induce others to directly infringe at least claim 1 of the '159 Patent.

85. On information and belief, Defendant also contributes to the infringement of the '159 Patent by others, including its customers. Acts by Defendant that contribute to the infringement of others include, but are not limited to, the sale, offer for sale, and/or importation by Defendant of the components of the Super Safety, Atrius Selector, and ARC-Fire, such as the cam or cam lever arm. The components are not suitable for substantial noninfringing use as they are specially designed and adapted to be used in a fire control unit to forcibly reset a trigger mechanism and infringe the '159 Patent.

86. Defendant has engaged in egregious infringement behavior with knowledge of the '159 Patent, which has been duly issued by the USPTO, and is presumed valid. On information and belief, Defendant has known or should have known that its actions constituted and continue to constitute infringement of the '159 Patent and that the '159 Patent is valid at least through the service of this complaint. Defendant could not reasonably or subjectively believe that its actions do not constitute infringement of the '159 Patent, nor could it reasonably or subjectively believe that the patent is invalid. Despite that knowledge and subjective belief, and the objectively high likelihood that its actions constitute infringement, Defendant has continued its infringing activities. As such, Defendant willfully infringes the '159 Patent.

87. By its actions, Defendant has injured Plaintiffs and are liable to Plaintiffs for infringement of the '159 Patent pursuant to 35 U.S.C. § 271.

88. By its actions, Defendant's infringement of the '159 Patent has irreparably injured Plaintiffs. Unless such infringing acts are enjoined by this Court, Plaintiffs will continue to suffer additional irreparable injury.

89. By its actions, Defendant's infringement of the '159 Patent has damaged and continues to damage, Plaintiffs in an amount yet to be determined.

90. Defendant's infringement of the '159 patent is exceptional and entitles Plaintiffs to attorneys' fees and costs incurred in prosecuting this action under 35 U.S.C. § 285.

91. Defendant's acts of infringement are willful and for no other purpose than to deliberately and irreparably harm Plaintiffs' business, sales, reputation, and good-will.

92. Plaintiffs have been substantially harmed by Defendant's infringing activities and are entitled to relief including but not limited to a preliminary injunction, a permanent injunction,

damages adequate to compensate for the infringement, being lost profits or no less than a reasonable royalty, treble damages, and attorneys' fees.

COUNT IX — INFRINGEMENT OF THE '403 PATENT

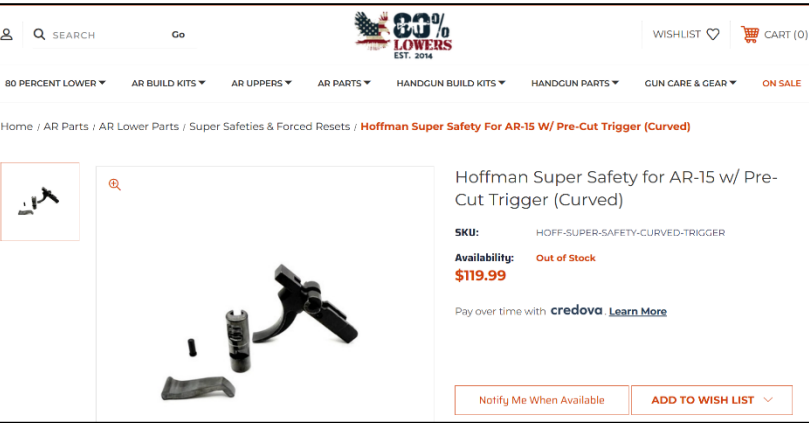
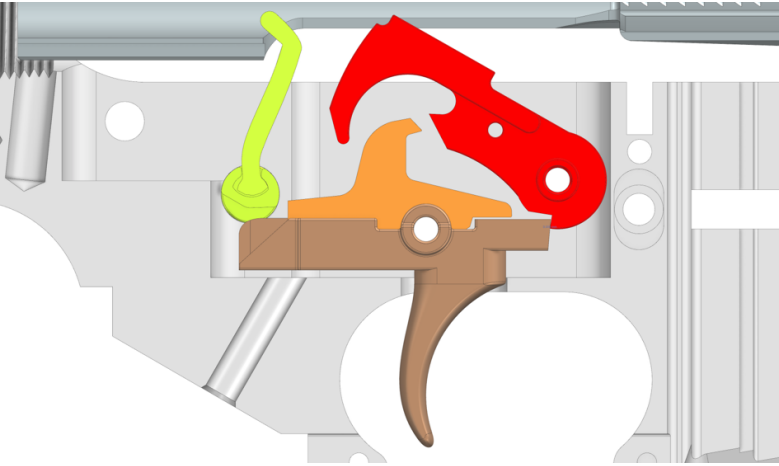
93. Plaintiffs re-allege and incorporate the allegations of the preceding paragraphs as if fully set forth herein.

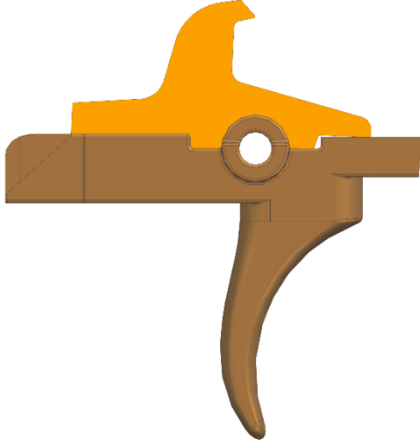
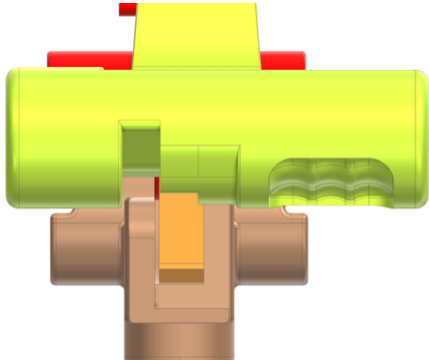
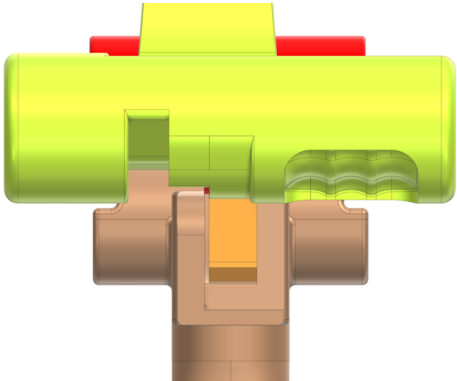
94. In violation of 35 U.S.C. § 271, Defendant has infringed, induced others to infringe, and/or contributed to the infringement of one or more claims of the '403 patent, including but not limited to claim 38, literally and/or under the doctrine of equivalents, by among other things, making, using, offering for sale, selling, and/or importing into the United States unlicensed products in a manner that infringes the '403 patent. Such unlicensed products include the Super Safety, Atrius Selector, Disruptor, and ARC-Fire.

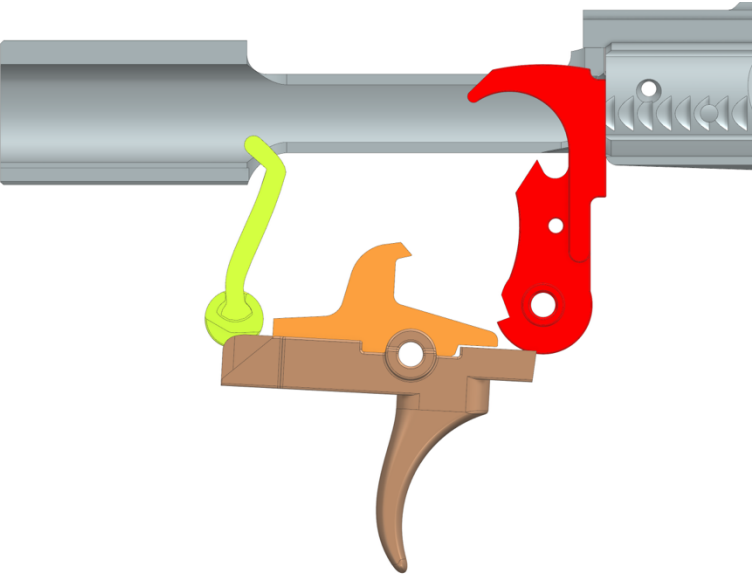
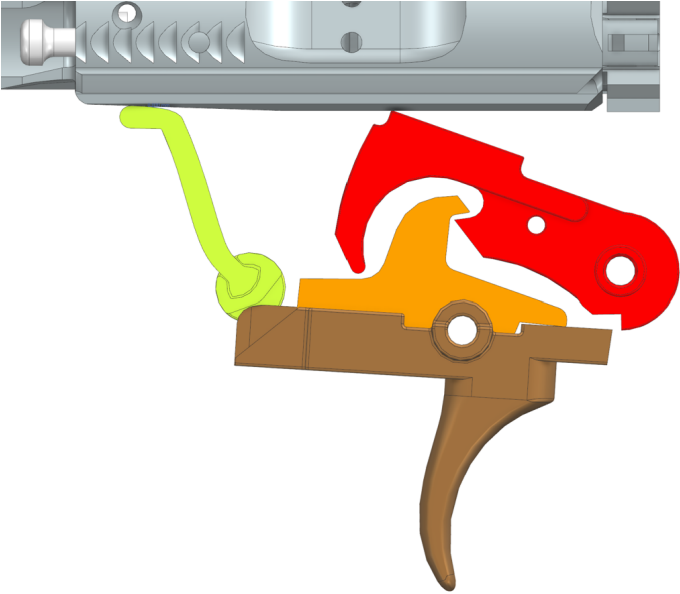
95. On information and belief, Defendant has and continues to willfully infringe, induce others to infringe, and/or contribute to the infringement of one or more claims of the '403 patent, including but not limited to claim 38, literally and/or under the doctrine of equivalents.

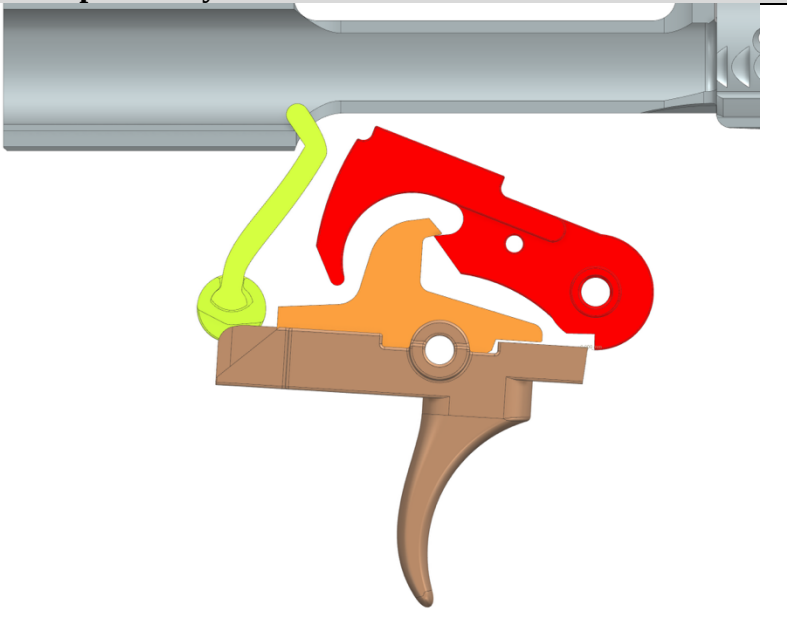
96. An exemplary comparison of the Super Safety, when assembled and used as intended, with claim 38 of the '403 patent is illustrated in the chart below:

'403 Patent Claim 38	The Super Safety
38. A forced reset trigger mechanism, comprising:	When installed and used as directed, the Super Safety is part of a forced reset trigger mechanism.

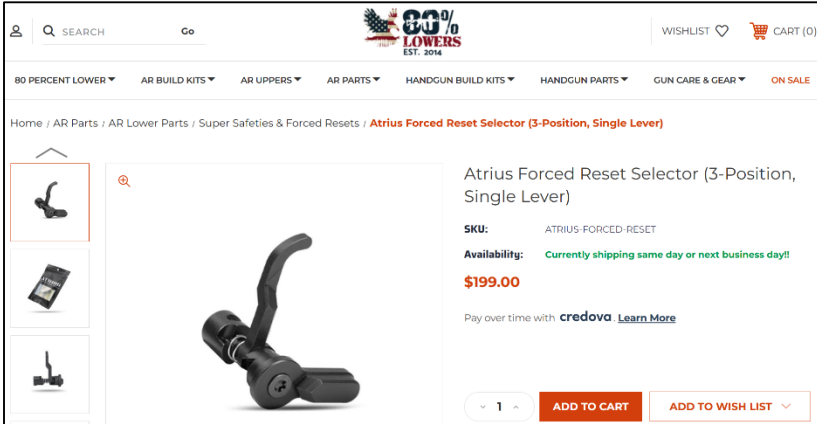
'403 Patent Claim 38	The Super Safety
	 Super Safety www.80-lower.com/products/hoffman-super-safety-for-ar-15-w-pre-cut-trigger-curved/
a hammer having a hammer hook and adapted to pivot on a transverse hammer pivot axis;	The Super Safety (yellow) is installed in a fire control mechanism pocket along with a hammer (red) that has a hammer hook and pivots on a transverse axis.  Super Safety (Installed) (Plaintiff-generated renderings of Super Safety here and below)
a disconnecter having a disconnecter hook and adapted to pivot on a transverse disconnecter pivot axis; a trigger member; and	The Super Safety is installed along with a disconnecter (orange) which has a disconnecter hook and pivots on a transverse disconnecter pivot axis, and a trigger member (brown)

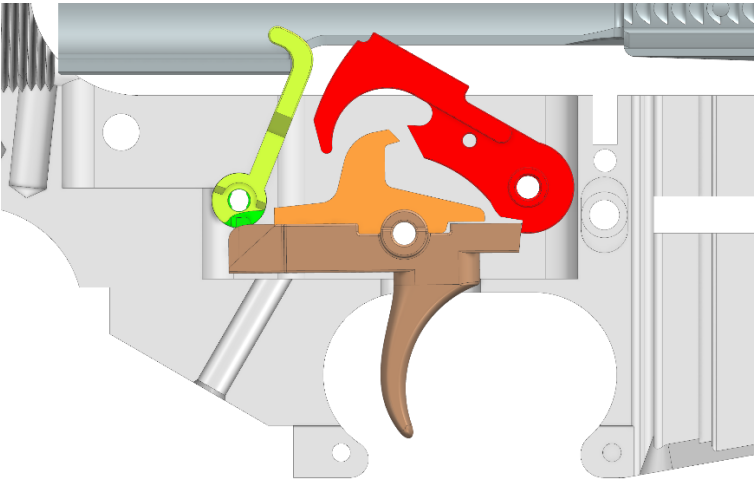
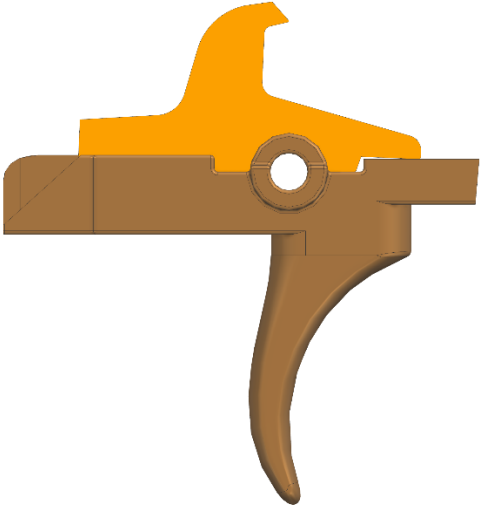
'403 Patent Claim 38	The Super Safety
	 Disconnecter and Trigger Member
a safety selector adapted to be movable between a standard semi-automatic position and a forced reset semi-automatic position,	The Super Safety is a safety selector adapted to be movable between a standard semi-automatic position,  Super Safety (installed) in Standard Semi-Automatic Position ... and a forced reset semi-automatic position,  Super Safety (installed) in Forced Reset Semi-Automatic Position

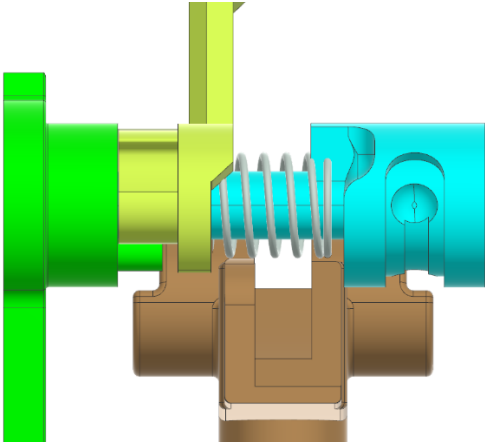
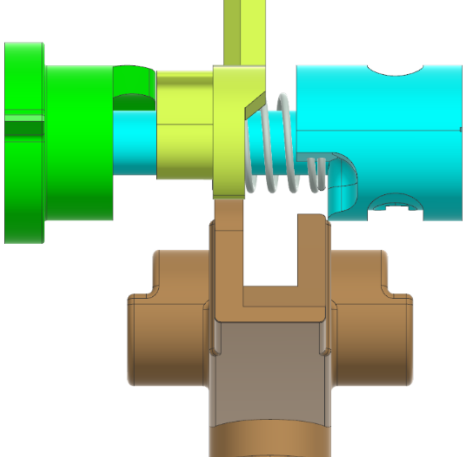
'403 Patent Claim 38	The Super Safety
wherein when the safety selector is in the standard semi-automatic position and the trigger member is rearwardly actuated, and after the hammer pivots rearward to a position where the hammer hook is past the disconnecter hook, rearward pressure on the trigger member must be reduced to permit the	When safety selector is in the standard semi-automatic position the trigger member (brown) is rearwardly actuated.  The hammer (red) pivots rearward to a position where the hammer hook is past the disconnecter hook (orange),  Hammer Hook is Past Disconnecter Hook Rearward pressure on the trigger member (brown) must be reduced to permit the trigger member to then be actuated to fire a firearm.

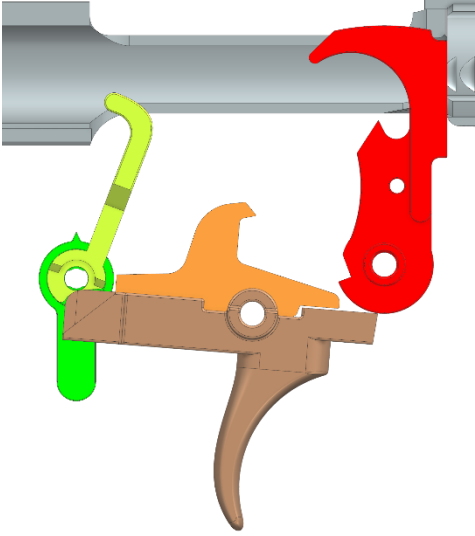
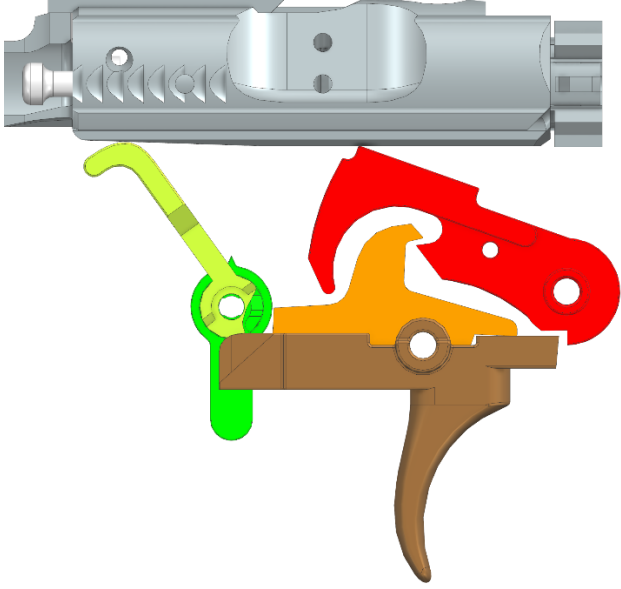
'403 Patent Claim 38	The Super Safety
trigger member to then be actuated to fire a firearm.	 Pressure Must be reduced

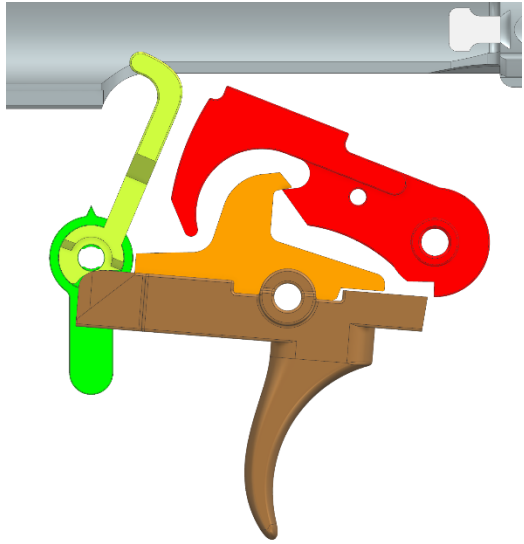
97. An exemplary comparison of the Atrius Selector, when assembled and used as intended, with claim 38 of the '403 Patent is illustrated in the chart below:

'403 Patent Claim 38	The Atrius Selector
38. A forced reset trigger mechanism, comprising:	When installed and used as directed, the Atrius Selector is part of a forced reset trigger mechanism.  Atrius Selector  www.80-lower.com/products/atrus-forced-reset-selector-3-position-single-lever/

'403 Patent Claim 38	The Atrius Selector
a hammer having a hammer hook and adapted to pivot on a transverse hammer pivot axis;	The Atrius Selector (yellow) is installed in a fire control mechanism pocket along with a hammer (red) that has a hammer hook and pivots on a transverse axis.  Atrius Selector (Installed) (Plaintiff-generated renderings of Atrius Selector here and below)
a disconnecter having a disconnecter hook and adapted to pivot on a transverse disconnecter pivot axis; a trigger member; and	The Atrius Selector is installed along with a disconnecter (orange) which has a disconnecter hook and pivots on a transverse disconnecter pivot axis, and a trigger member (brown).  Disconnecter and Trigger Member

'403 Patent Claim 38	The Atrius Selector
a safety selector adapted to be movable between a standard semi-automatic position and a forced reset semi-automatic position,	The Atrius Selector is a safety selector adapted to be movable between a standard semi-automatic position,  Atrius Selector (installed) in Standard Semi-Automatic Position . . . and a forced reset semi-automatic position.  Atrius Selector (installed) in Forced Reset Semi-Automatic Position

'403 Patent Claim 38	The Atrius Selector
wherein when the safety selector is in the standard semi-automatic position and the trigger member is rearwardly actuated, and after the hammer pivots rearward to a position where the hammer hook is past the disconnecter hook,	When safety selector is in the standard semi-automatic position the trigger member (brown) is rearwardly actuated.  The hammer (red) pivots rearward to a position where the hammer hook is past the disconnecter hook (orange), 

'403 Patent Claim 38	The Atrius Selector
rearward pressure on the trigger member must be reduced to permit the trigger member to then be actuated to fire a firearm.	Rearward pressure on the trigger member (brown) must be reduced to permit the trigger member to then be actuated to fire a firearm. 

98. On information and belief, in addition to direct infringement, Defendant takes active steps to induce others, including its customers, to directly infringe the '403 patent. Defendant takes such active steps knowing that those steps will induce, encourage, and facilitate direct infringement by others. Such active steps include, but are not limited to, encouraging, advertising, promoting, and instructing others to use and/or how to use the Infringing Devices while selling products.

Super Safety:

Super Safety Installation

1. Remove hammer and trigger pins.
2. Remove hammer, trigger, and disconnecter.
3. Uninstall original safety: Un-bolt the pistol grip. Remove safety detent and spring.
4. Install the Hoffman safety lever and its new detent. Reuse the safety detent spring.
5. Install the new trigger using your original disconnecter, trigger pin, and trigger spring.
6. Reinstall your hammer with its original hammer pin and hammer spring.
7. You're done! Hit the range! (R.I.P. your wallet)

Atrius Selector:

Selector Installation & Function

The Atrius Selector installs like any other AR-15 safety lever, utilizing the original safety lever hole, detent, and spring. The selector's screw should be tightened with blue Loctite and torqued to 15 in.-lbs. (1.7 Nm) with a T10 Torx bit. When installed properly, the curved tip of the Selector's cam lever should face rearward, toward the buffer.

99. On information and belief, Defendant knows or should know that such activities induce others to directly infringe at least claim 38 of the '403 Patent.

100. On information and belief, Defendant also contributes to the infringement of the '403 Patent by others, including its customers. Acts by Defendant that contribute to the infringement of others include, but are not limited to, the sale, offer for sale, and/or importation by Defendant of the components of the Infringing Devices, such as the can and lever arm or the trigger assembly. The components are not suitable for substantial noninfringing use as they are specially designed and adapted to be used in a fire control unit to forcibly reset a trigger mechanism and infringe the '403 Patent.

101. Defendant has engaged in egregious infringement behavior with knowledge of the '403 Patent, which has been duly issued by the USPTO, and is presumed valid. On information and belief, Defendant has known or should have known that its actions constituted and continue to constitute infringement of the '403 Patent and that the '403 Patent is valid at least through the service of this complaint. Defendant could not reasonably or subjectively believe that its actions do not constitute infringement of the '403 Patent, nor could it reasonably or subjectively believe that the patent is invalid. Despite that knowledge and subjective belief, and the objectively high likelihood that its actions constitute infringement, Defendant has continued its infringing activities. As such, Defendant willfully infringes the '403 Patent.

102. By its actions, Defendant has injured Plaintiffs and are liable to Plaintiffs for infringement of the '403 Patent pursuant to 35 U.S.C. § 271.

103. By its actions, Defendant's infringement of the '403 Patent has irreparably injured Plaintiffs. Unless such infringing acts are enjoined by this Court, Plaintiffs will continue to suffer additional irreparable injury.

104. By its actions, Defendant's infringement of the '403 Patent has damaged and continues to damage, Plaintiffs in an amount yet to be determined.

105. Defendant's infringement of the '403 patent is exceptional and entitles Plaintiffs to attorneys' fees and costs incurred in prosecuting this action under 35 U.S.C. § 285.

106. Defendant's acts of infringement are willful and for no other purpose than to deliberately and irreparably harm Plaintiffs' business, sales, reputation, and good-will.

107. Plaintiffs have been substantially harmed by Defendant's infringing activities and are entitled to relief including but not limited to a preliminary injunction, a permanent injunction, damages adequate to compensate for the infringement, being lost profits or no less than a reasonable royalty, treble damages, and attorneys' fees.

PRAYER FOR RELIEF

WHEREFORE, Plaintiffs respectfully request that this Court enter judgement against Defendant as follows:

- a. Each of the Asserted Patents has been and continues to be infringed by Defendant;
- b. Defendant's infringement of each of the Asserted Patents has been, and continues to be, willful;
- c. Each of the Asserted Patents is enforceable and not invalid;
- d. A preliminary injunction enjoining Defendant and its principals, agents, successors, assigns, attorneys, servants, affiliates, employees, divisions, branches, subsidiaries, parents, and all others acting in active concert therewith from infringement or contributing to the infringement

of each of the Asserted Patents during the pendency of this case, or other such equitable relief as the Court determines is warranted;

e. A permanent injunction enjoining Defendant and its principals, agents, successors, assigns, attorneys, servants, affiliates, employees, divisions, branches, subsidiaries, parents, and all others acting in active concert therewith from infringement or contributing to the infringement of each of the Asserted Patents, or other such equitable relief as the Court determines is warranted;

f. An award of damages adequate to compensate Plaintiffs for the infringement of each of the Asserted Patents that has occurred, together with pre-judgment interests and costs, post-judgment interests and costs, and an accounting;

g. An award of all other damages permitted by 35 U.S.C. § 284, including increased damages up to three times the amount of compensatory damages found;

h. A finding that this action is an exceptional case under 35 U.S.C. § 285 and an award to Plaintiffs of their costs and attorneys' fees incurred in this action; and

i. Any and all other relief, at law or equity, to which Plaintiffs may show themselves to be entitled or which this Court deems just and proper.

DEMAND FOR JURY TRIAL

Plaintiffs, under Rule 38 of the Federal Rules of Civil Procedure, requests a trial by jury of any issues so triable by right.

DATED: June 2, 2026

Respectfully submitted,

/Glenn D. Bellamy/

Glenn D. Bellamy (OH Bar 0070321)

WOOD HERRON & EVANS LLP

600 Vine Street, Suite 2800

Cincinnati OH 45202

E-mail: gbellamy@whe-law.com

Tel: (513) 707-0243

Fax: (513) 241-6234

Matthew A. Colvin (Pro Hac Vice)

Texas Bar No. 24087331

Carl E. Bruce (Pro Hac Vice)

Texas Bar No. 24036278

FISH & RICHARDSON P.C.

1717 Main Street, Suite 5000

Dallas, TX 75201

E-mail: colvin@fr.com

bruce@fr.com

Tel: (214) 747-5070

Fax: (214) 747-2091

Benjamin J. Christoff (Pro Hac Vice)

DC Bar No. 1025635

FISH & RICHARDSON P.C.

1001 Maine Avenue SW, Suite 1000

Washington, DC 20024

E-mail: christoff@fr.com

Tel: (202) 783-5070

Fax: (202) 783-2331

Attorneys for Plaintiffs

ABC IP, LLC, and Rare Breed Triggers, Inc.